

# DIGITUS® Patch holder for wall mounting for 483 mm (19") installations

DN-19 PB-8U-SW  
EAN 4016032228806



**8U wall mounting patch bracket, 372x505x250 mm adjustable depth, stackable, black (RAL 9005)**

The patch holders for wall mounting are used to install 483 mm (19") components. Depending on individual space requirements, they are available in various height units. The adjustable depth (from 250 mm up to 430 mm) enables the installation of larger components. A large punched-out area at the rear can be used for cable routing if the cables come directly out of the wall, for example.

- for the installation of 483 mm (19") components
- 1.1 - 1.5 thick sheet steel, powder-coated
- depth-adjustable (min. 250 mm; max. 430 mm)
- with four holes for wall mounting
- Back with cut-out for e.g. Cabling

**Attributes**


- Cabinet type: Wall Mounting Brackets
- Color: black, RAL 9005
- Front door: without
- Load capacity: 15 kg
- Side panels: Both sides
- Units: 8
- Width: 505 mm
- IP protection class: without
- Mounted: no

**Package contents**

- Fastening material for stacking

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	5	31.00	41.00	55.50	22.00	50,061.00
Packaging Unit Inside	1	6.20	38.00	53.00	4.00	8,056.00
Packaging Unit Single	1	6.20	38.00	53.00	4.00	8,056.00
Net single without Packaging	1	6.03	38.00	53.00	4.00	8,056.00

**More images:**

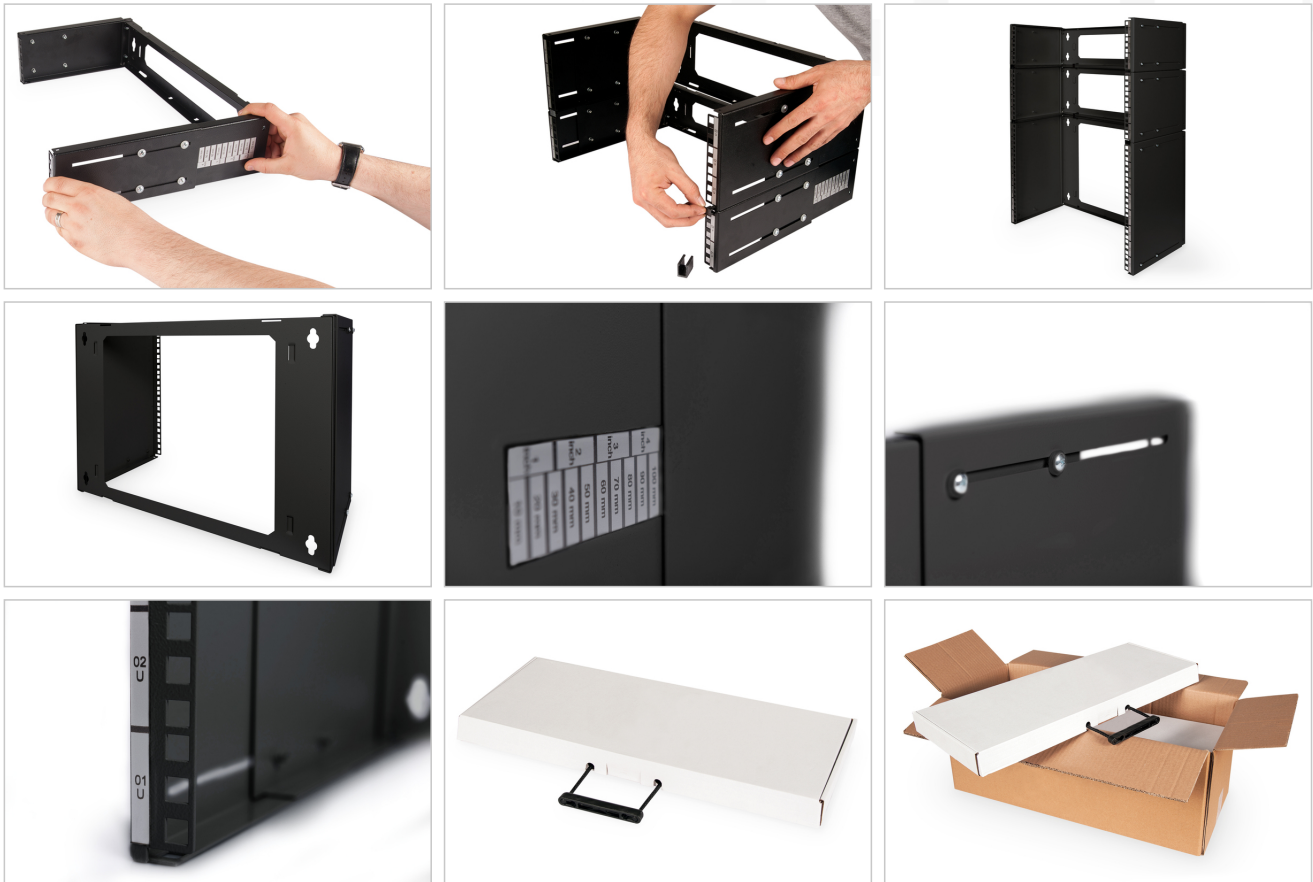

**Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be neatly routed and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)