DIGITUS® Hub de 3 portas USB 3.0 e adaptador LAN Gigabit

DA-70250-1

EAN 4016032423836

USB 3.0, HUB de 3 portas e adaptador LAN Gigabit 3xUSB A/F,1xUSB A/M,1xRJ45 LAN, Win/Mac OS

Com o hub DIGITUS® USB 3.0 de 3 portas e adaptador Gigabit LAN, pode ligar 3 dispositivos adicionais de alta velocidade USB 3.0 ao seu Ultrabook™, portátil, subnotebook, Macbook, Macbook Air, etc. Impressoras, discos rígidos, memória flash, leitores de cartões, altifalantes e muitos outros dispositivos podem ser facilmente ligados através da interface USB. O adaptador também adiciona uma porta Gigabit Ethernet ao seu computador, tornando-o compatível com a rede, uma vez que muitos dispositivos móveis atualmente só podem ser ligados à rede através de LAN sem fios.

Transferência rápida de dados graças ao USB 3.0 e à LAN Gigabit

- Retrocompatível com USB 2.0 e 1.1
- Compatível com IEEE 802.3, IEEE 802.3u e IEEE 802.3ab
- Suporta operação full-duplex com controlo de fluxo e half-duplex com contrapressão
- Suporta deteção e correção automática de crossover de par entrançado (HP Auto MDIX)
- Suporta Wake-On-LAN
- Compatível com Windows 10, 8.1, 8, 7, Vista, XP e Mac OS 10.x
- Ligações: 1x porta RJ-45 10/100/1000 Mbps, 3x USB 3.0 tipo A (F), 1x cabo de ficha USB tipo A
- Dimensões: 95 x 27,2 x 16mm
- Peso: 32g

Attributes

- Number of ports: 3
- USB standard: USB 3.0 / 3.1
- USB-A (2.0) Connectors: 0
- USB-A (3.0) Connectors: 3
- USB-C Connectors: 0

Package contents

- Hub de 3 portas USB 3.0 e adaptador LAN Gigabit
- QIG (Guia de Instalação Rápida)

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	125	9.02	46.00	35.00	35.00	56,350.00
Packaging Unit Inside	1	0.07	22.00	15.00	2.70	891.00
Packaging Unit Single	1	0.07	22.00	15.00	3.00	990.00
Net single without Packaging	1	0.03	9.50	2.70	1.60	0.00

More images:

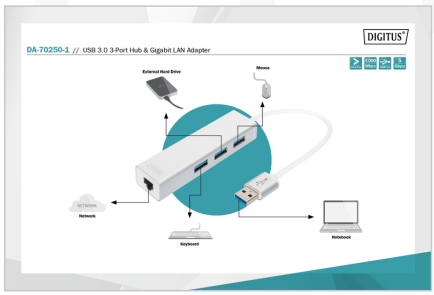

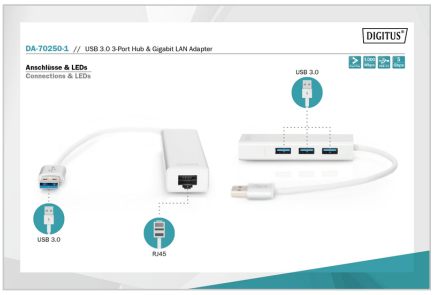

Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com