


DIGITUS® Cabo DAC SFP+ 10G 2m

DN-81222-02

EAN 4016032446095

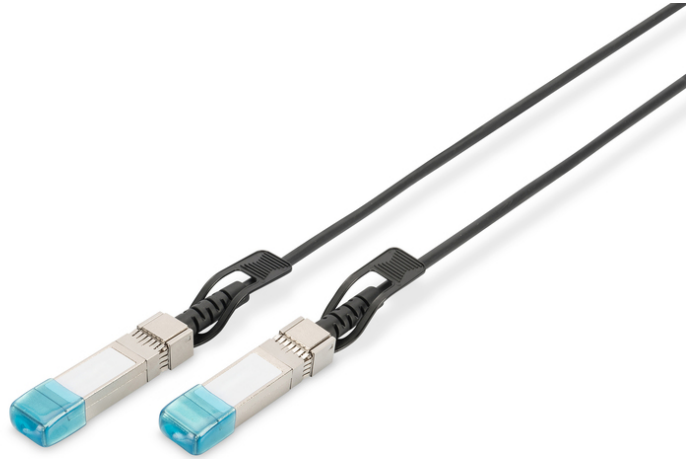

Cabo SFP+ 10G DAC 2m AWG 30, compatível com HP

Os cabos SFP+ 10G DAC da Digitus® são a ligação ideal entre switches na área de backbone. As seguintes taxas de dados e aplicações são suportadas para a utilização de cabos SFP+ 10G DAC: Ethernet 10G (10,21 Gbps), canal de fibra 10G (10,52 Gbps), canal de fibra 8G (8,5 Gbps), canal de fibra 4G (4,25 Gbps), canal de fibra 2G (2,125 Gbps), canal de fibra 1G (1,0625 Gbps), Gigabit Ethernet (1,25 Gbps), opção CPRI2,3,5,6,7,8, OBSAI RP3 x 2, RP3 x 4, RP x 8. Os cabos SFP+ 10G DAC são compatíveis com Hewlett Packard (HP) H3C.

Expanda as suas ligações de cobre

- Cabo Twinax AWG 30
- 2 m de distância máxima
- 1,0625-10,52 Gbps taxa de dados suportada
- Aplicações suportadas: Ethernet 10G (10,21 Gbps), canal de fibra 10G (10,52 Gbps), canal de fibra 8G (8,5 Gbps), canal de fibra 4G (4,25 Gbps), canal de fibra 2G (2,125 Gbps), canal de fibra 1G (1,0625 Gbps), Gigabit Ethernet (1,25 Gbps), opção CPRI2,3,5,6,7,8, OBSAI RP3 x 2, RP3 x 4, RP x 8
- Marcas compatíveis: Compatível com Hewlett Packard (HP/Aruba)
- Suporte DDM / DOM

- Gama de temperaturas: 0-70 ° C
- Ligações: SFP +
- Alimentação: + 3,3V tensão de alimentação
- Consumo de energia: 0,5 W
- Tipo de transceptor: DAC
- Compatível com os seguintes fabricantes: Allnet, CISCO, 3COM, D-LINK, Dell, Edimax, Etherwan, ENTERASYS, EXTREME, FINISAR, FORCE 10, Fortinet, HUAWEI, IBM, JUNIPER, LINKSYS, NETGEAR, NORTEL, RIVERSTONE, ZTE, ZYXEL

Attributes

- AWG: 30
- Made: Copper
- Length: 2 m
- DDM Support: yes
- Manufacturer compatibility: HP
- Connection: SFP+
- Ethernet speed: 10 Gigabit

Package contents

- Cabo DAC SFP+ 10G 2m
- Guia de início rápido

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	1.50	48.00	48.00	38.00	87,552.00
Packaging Unit Inside	1	0.01	26.00	26.00	3.00	2,028.00
Packaging Unit Single	1	0.01	26.00	26.00	3.00	2,028.00
Net single without Packaging	1	0.02	5.80	1.40	1.10	0.00

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage

- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com