

DIGITUS® Injetor Gigabit Ethernet PoE++, 802.3bt, 85 W

DN-95109

EAN 4016032464495



Injetor Gigabit Ethernet PoE++, 802.3bt Pinos de alimentação: 4/5(+), 7/8(-) e 3/6(+), 1/2(-), 85W

O injetor 802.3bt da DIGITUS® oferece uma porta PoE de 85 watts como uma solução de médio alcance. Compacto, económico e totalmente compatível com IEEE802.3bt. A solução simples para alimentação remota de pontos de acesso sem fios, câmaras de segurança IP, telefones VoIP, thin clients e outras instalações com funcionalidade PoE. Os dispositivos compatíveis com PoE+ /PoE++ podem ser alimentados com energia e dados através do cabo de rede - uma solução segura e fiável para expandir a infraestrutura de rede existente. O injetor reconhece diferentes modos PoE (A/B) - Plug & Play.

Fonte de alimentação e transmissão de dados com uma largura de banda até 1 Gbps e 85 watts de potência através de um único cabo de rede - para dispositivos compatíveis com PoE, como pontos de acesso, telefones IP, sistemas POS ou câmaras IP

- Suporta aplicações 10/100/1000 Base-T
- Normas suportadas: IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt
- Indicador LED: Entrada de energia / saída PoE
- Potência PoE: 85W (PoE++ através de 4 pares de fios)
- Para distâncias até 100 m
- LED indicador de funcionamento
- Ligação eléctrica IEC integrada (C 6)

- Protecção contra sobrecarga e curto-circuito
- Deteção automática de dispositivos PoE / modos PoE
- Fonte de alimentação: 100 - 240 V AC 50/60Hz
- Consumo total de energia: 3W máximo.
- Tensão PoE: DC 56V / 1.5A
- Atribuição de pinos: Modo A: V+ (RJ45 pinos 3, 6), V- (RJ45 pinos 1, 2) / Modo B: V+ (RJ45 pinos 4/5), V- (RJ45 pinos 7/8)
- Temperatura de funcionamento: 0 ~ 40°C
- Temperatura de armazenamento: -10 ~ 70°C
- Humidade de funcionamento: 5 - 95% (sem condensação)
- Dimensões: 180 x 65 x 40 mm (CxLxA)
- Peso: 0,6 kg

Attributes

- Number of ports: 1
- PoE Power budget: 85 W
- PoE standard: IEEE802.3bt (PoE++)
- Ethernet speed: Gigabit
- Industrial usage: no


Package contents

- Injetor Gigabit Ethernet PoE++, 802.3bt, 90 W
- Cabo IEC (ficha de segurança / tomada IEC 5)
- Guia rápido

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	1.00	20.00	33.00	27.00	17,820.00
Packaging Unit Inside	1	0.10	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.10	6.00	11.60	19.00	1,322.40
Net single without Packaging	1	0.06	4.00	6.60	18.00	0.00

More images:

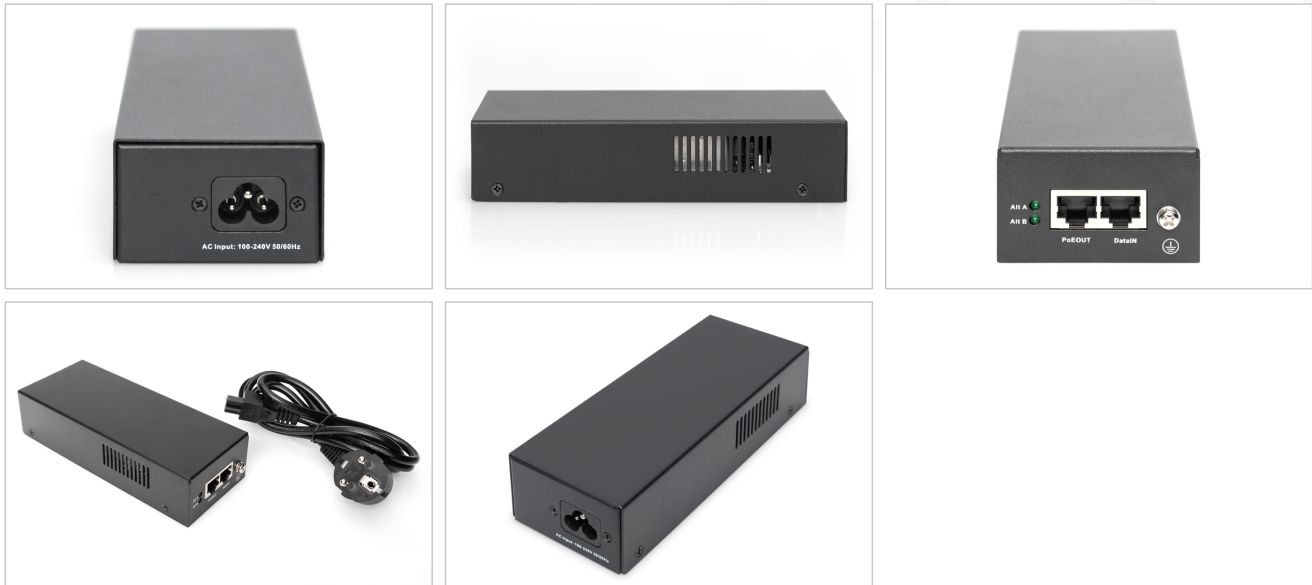

Safety notes

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and return it to an authorized service centre for repair
 - The mains cable, power supply unit or plug for the power supply is damaged or worn;
 - Liquid has penetrated the appliance;
 - The device has been exposed to rain or water;
 - The device has been dropped or the housing has been damaged;
 - The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com