

DIGITUS 40G QSFP+ to 4XSFP+ Direct Attach Cable 3m

DN-81323
EAN 4016032484998



DAC Breakout cabel 3 m 1x 40G to 4x 10G 1x 40G to 4x 10 G

The DN- 81323 Breakout DAC cables QSFP+ to 4xSFP+ is optimized to be used in Datacenter. They meet the ever increasing demand for higher channel density with high-level signal integrity in high performance computing, core switches and NAS Systems.

Up to 10.3125Gbps data rate per channel, Up to 5m transmission, Operating temperature: 0~70°, Single +3.3V power supply

- Channel Data Rate 10.3125 Gbps
- Operating Temperature 0 to + 70°C
- Storage Temperature -40 to + 85°C
- Supply Voltage 3.3 V nominal
- Electrical Interface 38 pins edge connector(QSFP+)

- 20 pins edge connector(SFP+)
- Management Interface Serial, I2C
- Cable length: 3m
- Compatible with the following manufacturers: Allnet, CISCO, 3COM, D-LINK, Dell, Edimax, Etherwan, ENTERASYS, EXTREME, FINISAR, FORCE 10, Fortinet, HUAWEI, IBM, JUNIPER, LINKSYS, NETGEAR, NORTEL, RIVERSTONE, ZTE, ZYXEL

Attributes

- DDM Support: no


Package contents

- 40G QSFP+ to 4XSFP+ Direct Attach Cable 3m

Logistics

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| Packaging Unit Carton | 80 | 15.00 | 48.00 | 48.00 | 38.00 | 87,552.00 |
| Packaging Unit Inside | 1 | 0.19 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Single | 1 | 0.19 | 26.00 | 26.00 | 3.00 | 2,028.00 |
| Net single without Packaging | 1 | 0.34 | 5.80 | 1.40 | 1.30 | 0.00 |

More images:

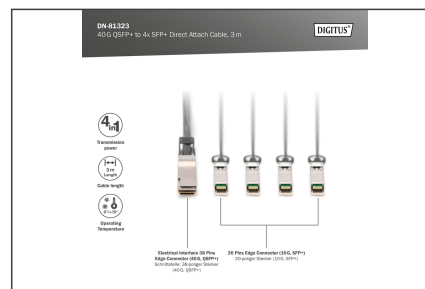



Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com