

DIGITUS® NVMe cloning station USB3.1 Gen2 Type-C NVMe M.2 SSD enclosure

DA-71545-1

EAN 4016032501381



Dual Bay Nvme SSD Docking Station 2 bay NVME duplicator M.2 SSD Docking Station

The DIGITUS® Dual NVMe Docking Station DA-71545-1 offers a powerful storage solution for IT professionals and enthusiasts. With space for two M.2 NVMe SSDs (up to 4 TB per slot), it enables high-speed data transfers and an integrated offline cloning function that allows easy duplication of data carriers at the touch of a button.

Manage M.2 NVMe and M.2 SATA SSDs via a USB-C™ connection

- Capacity: Maximum 4 TB per slot, total: Up to 8 TB storage space
- Supported SSD formats: M-Key & B+M-Key SSDs (NVMe), Sizes: 2242, 2260, 2280 & 22110
- Connections: □USB-C™ (data): USB 3.2 Gen2 □USB-C™ (power supply): 5 V / 3 A
- Maximum transmission speed: 10 Gbps


- Modes: Clone mode (offline cloning function without PC), dual mode (simultaneous use of both SSDs)
- Compatible devices: PCs, notebooks, NAS, smart TVs, routers, gaming consoles (with USB-C™ connection)
- Supported file systems: NTFS, FAT, FAT32
- Power supply: Input: 100 - 240 V AC / 50/60 Hz, 0.6 A (Euro plug type A CEE 7/16), output: 5 V / 3 A via USB-C™
- Supported operating systems: □Windows 11/10/8/8.1/7/XP □macOS 10.0 or higher □Linux
- Dimensions & weight: □Dimensions (W x D x H): 7.9 x 7.7 x 1.8 cm □Weight: 152 g

Package contents

- NVMe cloning station
- USB A to USB C connection cable
- USB C to USB C connection cable
- Power supply unit 5V, 3A, 15W

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 20 | 6.90 | 32.50 | 35.50 | 24.00 | 27,690.00 |
| Packaging Unit Inside | 1 | 0.35 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Single | 1 | 0.35 | 10.60 | 15.00 | 7.00 | 1,113.00 |
| Net single without Packaging | 1 | 0.12 | 6.60 | 10.20 | 1.50 | 0.00 |

More images:

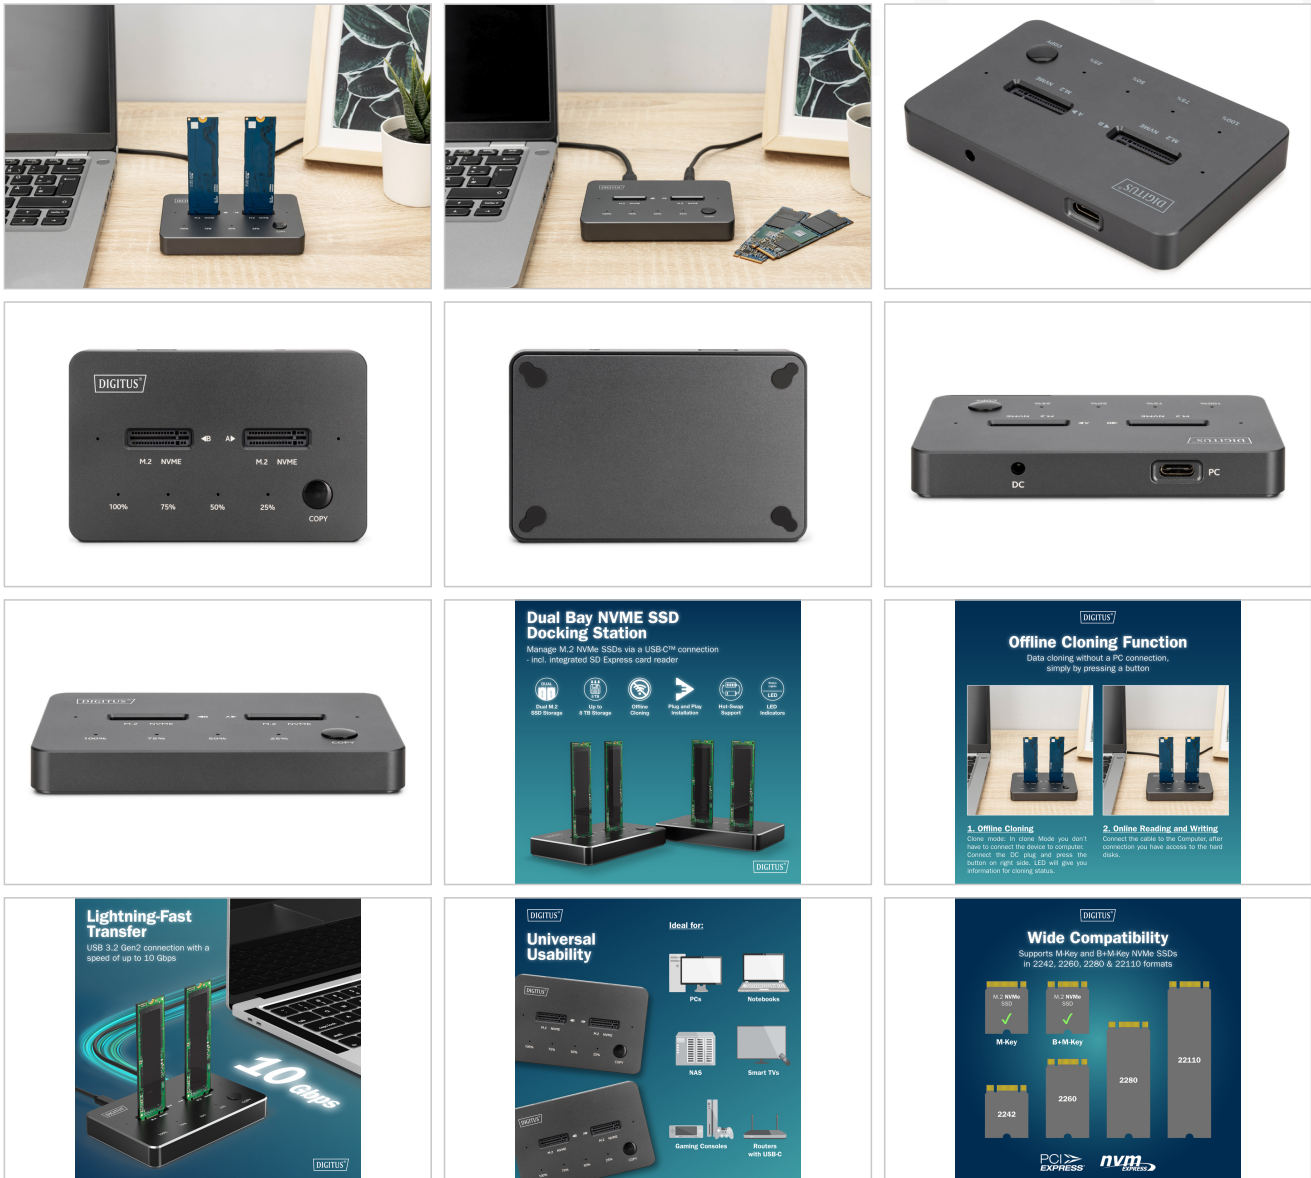

Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>

info@assmann.com