

DIGITUS 2,5" SATA HDD Enclosure M.2 or mSATA

DA-71118

EAN 4016032457688



2,5" SATA HDD Enclosure M.2 or mSATA SATA 3 6 Gbit/s, write speed up to 520 MB/s

With the DIGITUS® 2.5" SATA HDD Enclosure, you can increase system speed and performance cost-effectively by installing an M.2 or mSATA SSD in your PC or notebook. The hard disk adapter is used like a standard 2.5" hard disk with SATA III connection. Due to the low installation height of only 7 mm, it can be installed in all common notebooks. M.2 (NGFF) SSDs of the following type are supported: M.2 Types 2230, 2242, 2260, 2280 with B-Key and B+M-Key. M.2 PCIe NVMe SSDs with M-Key are not supported. Furthermore mSATA SSDs with Mini PCIe 52 PIN are supported as full size version. The built-in SSD is selected via DIP switch on the board. Boot processes are supported by the adapter for all standard operating systems such as Windows, Mac OS or Linux. The internal SSD memory is protected from dust and damage by the completely closed aluminum housing. The SATA III interface offers a data transmission speed of 6 Gbit/s, the reading speed can be up to 520 MB/s, depending on the SSD used. The adapter supports SATA Rev.3.2 with DEVSLP power saving mode.

Use an M.2 or mSATA SSD as a 2.5" hard disk for your PC or notebook


- 2.5" SATA HDD Enclosure with 7 mm height
- Suitable for M.2 SSD (2230, 2242, 2260, 2280) with B-Key or B+M-Key
- Suitable for mSATA SSD (full size)
- Allows booting from the built-in SSD
- SATA III interface with 6 Gbit/s
- Reading speed up to 520 MB/s
- SATA Rev.3.2 with DEVSLP energy saving mode
- Mode Setting via DIP Switch
- Completely closed aluminium housing
- PCI Express M.2 Spec. Revision 0.7, Version 1.0
- PCI Express Mini Card Electromechanical Spec. 1.2
- Dimension: 100 x 70 x 7 mm

Package contents

- 2,5" SATA HDD Enclosure M.2 or mSATA
- QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	60	6.00	27.00	19.50	23.50	12,372.80
Packaging Unit Inside	1	0.10	10.00	12.00	1.50	180.00
Packaging Unit Single	1	0.10	10.00	12.00	1.50	180.00
Net single without Packaging	1	0.05	7.00	10.00	1.00	0.00

More images:

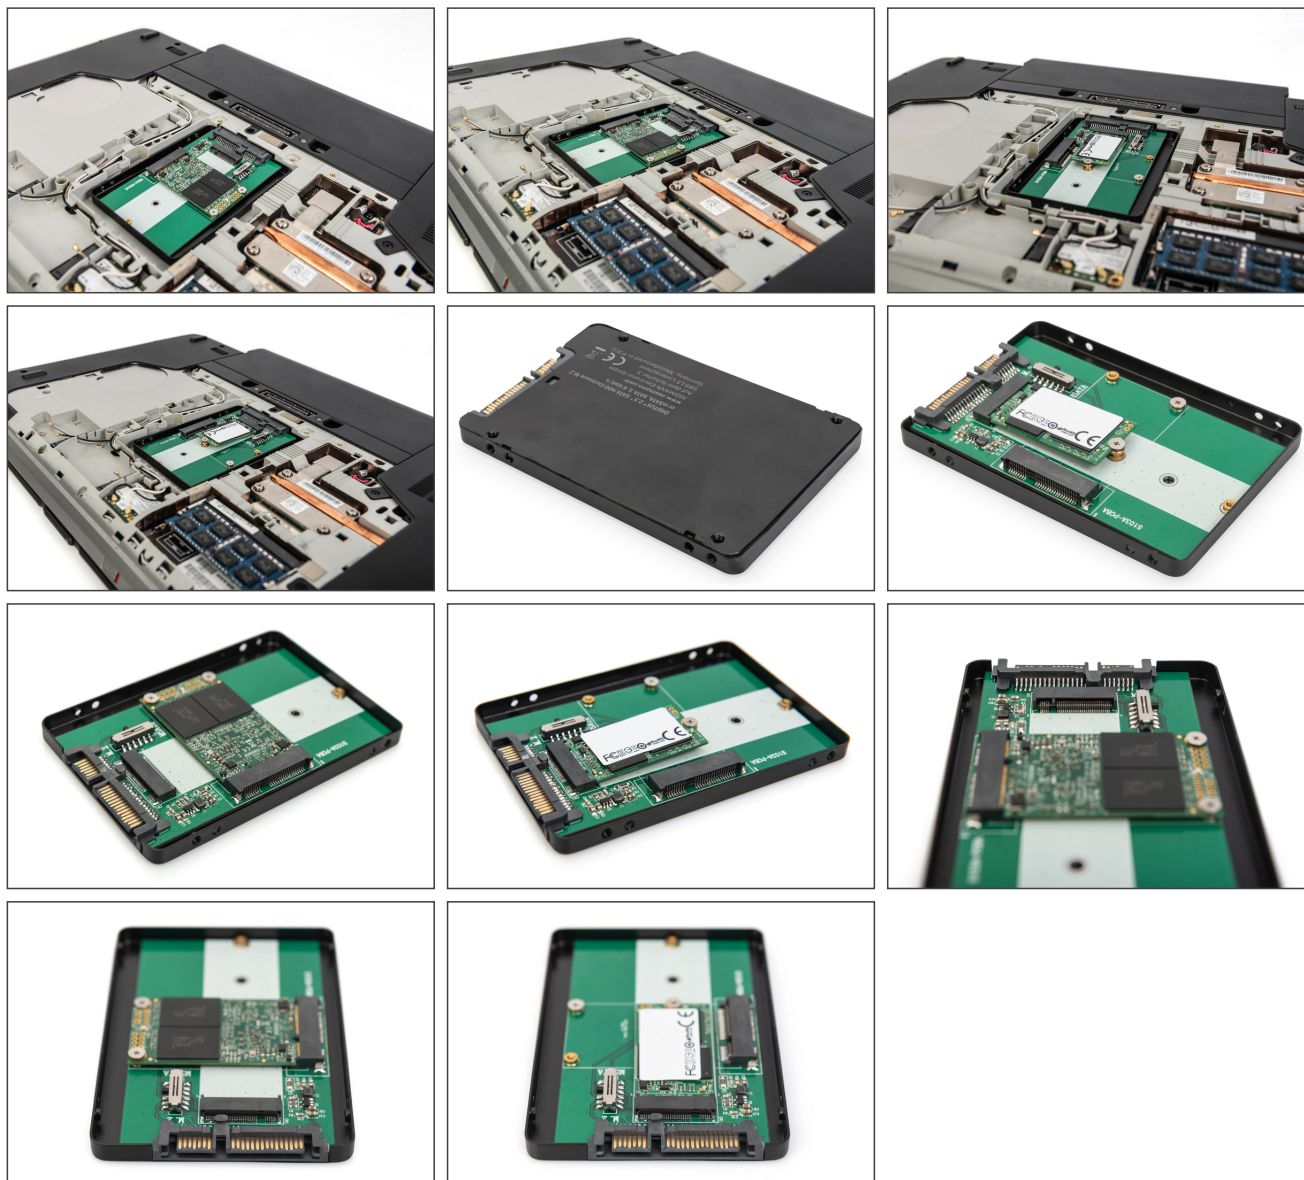

Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com