

DIGITUS® Injetor Industrial Gigabit Ethernet PoE+, 802.3 af/at, 60 W

DN-651112

EAN 4016032445845



Injetor Industrial Gigabit PoE+ 802.3 af/at Potência de saída de 60 W, montagem em calha de topo e na parede,

Com a ajuda do injetor PoE da Digitus, pode minimizar o esforço de cablagem ao instalar dispositivos com capacidade PoE, como câmaras de rede IP. A alimentação de dados e de energia dos aparelhos é efectuada apenas através de um cabo Ethernet. Isto elimina a necessidade de instalar um cabo de alimentação separado e permite-lhe expandir a sua rede mesmo onde não existam tomadas ou cabos de alimentação. O injetor é totalmente compatível com a norma IEEE 802.3at Ultra PoE e fornece uma potência de saída de 60 watts.

Potência de saída elevada com 60 watts

- Em conformidade com a norma 802.3af/at PoE
- Tensão de saída 45 - 56 Volt, 60 Watt
- Entrada LAN RJ45
- Saída LAN (RJ45), alimentação eléctrica através dos pinos: 4/5(+),7/8(-) e 3/6(+),1/2(-)
- Ligação por cabo: 10/100/1000 Mbps
- A saída tem um limitador de corrente, proteção contra curto-circuitos e deteção e classificação automáticas do dispositivo terminal
- Auto-consumo: 3W máx.
- Temperatura de funcionamento: -40°C - 75°C
- Menos de 0,3 W de consumo de energia em inatividade

- Caixa metálica compacta e robusta
- Excelente proteção contra curto-circuitos
- Proteção contra raios e sobretensões
- Possibilidade de montagem em calha DIN (calha superior) e na parede
- Especificação do consumo de energia: DC 44 - 57V / 1,5A
- Dispositivo Consumo de energia (máx.): 5W

Attributes


- PoE Power budget: 60 W
- PoE standard: IEEE802.3at (PoE+)
- Ethernet speed: Gigabit
- Power output: Depending on power supply
- Industrial usage: yes
- Installation type: DIN rail
- Managed: no
- Outdoorsuitable: no
- PoE (Power over Ethernet): yes
- Protection against vandalism: no
- VLAN: no

Package contents

- Injetor Industrial Gigabit PoE+ 802.3 af/at
- Guia de início rápido

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	36	14.76	39.00	35.00	33.00	45,045.00
Packaging Unit Inside	1	0.41	16.50	12.50	5.00	1,031.25
Packaging Unit Single	1	0.41	16.50	12.50	5.00	1,031.25
Net single without Packaging	1	0.30	10.30	7.70	3.20	0.00

More images:

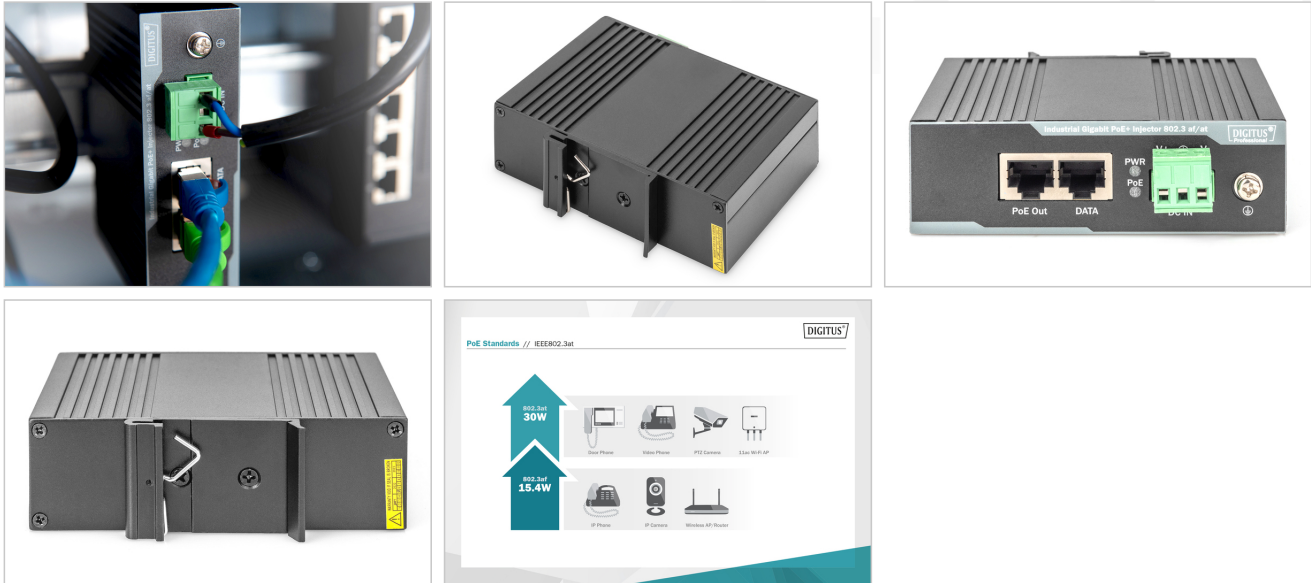

Safety notes

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and return it to an authorized service centre for repair
 - The mains cable, power supply unit or plug for the power supply is damaged or worn;
 - Liquid has penetrated the appliance;
 - The device has been exposed to rain or water;
 - The device has been dropped or the housing has been damaged;
 - The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com