# DIGITUS® Wireless HDMI transmitter for Click & Present Pro (DS-55317)

**DS-55322**

**EAN 4016032478911**




**Wireless HDMI Transmitter (TX) additional unit for DS-55317**

Expand the DIGITUS® Wireless Collaboration System Click & Present Pro (DS-55317) with additional transmitter units for even more participants in meetings and presentations. Up to 30 transmitters can be connected to the receiver. Connect the HDMI transmitter to your notebook via the HDMI port and USB-A port for the power supply. Connect to the receiver quickly and easily at the touch of a button and share your content - no software installation required. Share - Present - Collaborate.

**Expand the Click & Present Pro wireless collaboration system (DS-55317) with additional transmitters for even more participants**

- Expand the Click & Present Pro wireless collaboration system (DS-55317) to up to 30 HDMI transmitters
- Easy installation - No software required - Plug, Press & Play
- Transmission distance: up to 50 m (unrestricted view)
- Transmitter connections (transmitter):
- 1x HDMI, plug (Full HD, 1080p) - connection to notebook, video output, cable length: 5 cm
- 1x USB-A, plug - connection on notebook, power supply, cable length: 12 cm
- 1x connection button - Easy sharing
- 1x LED status display
- Radio standard: IEEE 802.11 b/g/n/ac, 2.4G/5GHz, 2T2R
- AES 128-bit encryption
- WPA2/WPA-PSK/WPA2-PSK authentication
- Latency: approx. 100 ms
- Supports Windows, macOS
- Compression: H.264
- Housing: ABS
- Dimensions: L 8.0 x W 8.0 x H 1.4 cm
- Color: grey/black
- Notes:
- The transmission distance with limited visibility cannot be determined across the board and depends on the conditions on site
- Walls, glass, etc. shorten the signal coverage or cause signal loss

**Attributes**

- KVM: no
- PoE (Power over Ethernet): no

**Package contents**

- 1x Wireless HDMI transmitter
- 1x manual

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 30 | 8.37 | 21.00 | 48.00 | 26.50 | 26,712.00 |
| **Packaging Unit Inside** | 1 | 0.28 | 0.00 | 0.00 | 0.00 | 0.00 |
| **Packaging Unit Single** | 1 | 0.28 | 11.00 | 19.00 | 2.80 | 585.20 |
| **Net single without Packaging** | 1 | 0.09 | 8.00 | 8.00 | 1.40 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**




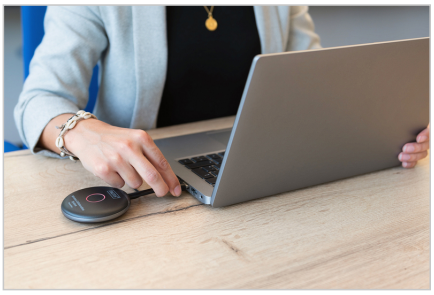


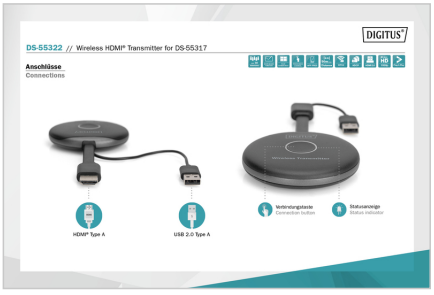

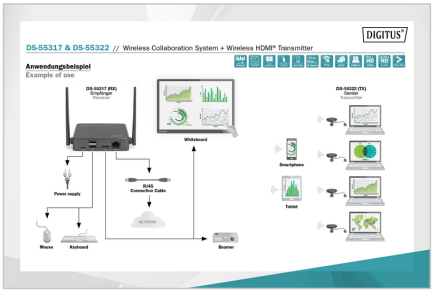





**Safety notes**

- Please read these instructions carefully before using the appliance and keep them for future reference.
- For indoor use only.
- Do not use the device in a damp environment or near water.
- Do not expose the product to extremely high or low temperatures, strong light sources or direct sunlight.
- This product is not a toy. Keep it out of the reach of children.
- Do not connect the adapter to the mains until you have made sure that the mains voltage corresponds to the value specified on the rating plate.
- Never connect the power supply unit if it is damaged. In such cases, please contact your supplier.
- Disconnect the AC/DC mains adapter from the power supply if the appliance is not to be used for a longer period of time.
- Never open the product: The appliance may contain parts with lethal voltage. Repairs or maintenance should only be carried out by qualified personnel.
- Improper use, modifications or repairs carried out by the user will invalidate all warranties.
- - We accept no product responsibility for improper or non-intended use of the product.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com

info@assmann.com


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.