

Digitus® Bežični HDMI predajnik za Click & Present Pro (DS-55317)

DS-55322

EAN 4016032478911



Wireless HDMI Transmitter (TX) additional unit for DS-55317

Proširite DIGITUS® bežični sustav za suradnju Click & Present Pro (DS-55317) dodatnim odašiljačima za još više sudionika na sastancima i prezentacijama. Do 30 predajnika može se povezati na prijemnik. Povežite HDMI predajnik s prijenosnim računalom putem HDMI priključka i USB-A priključka za napajanje. Brzo i jednostavno se povežite s prijemnikom jednim dodirom gumba i dijelite svoj sadržaj – nije potrebna instalacija softvera. Dijelite – Prikažite – Suradite.

Proširite bežični sustav za suradnju Click & Present Pro (DS-55317) dodatnim odašiljačima za još više sudionika.

- Proširite bežični sustav za suradnju Click & Present Pro (DS-55317) na do 30 HDMI predajnika.
- Jednostavna instalacija - Nije potreban softver - Spojite, pritisnite i igrajte
- Domet prijenosa: do 50 m (bez prepreka)
- Povezivanja predajnika:
- 1x HDMI priključak (Full HD, 1080p) – za povezivanje s prijenosnim računalom, video izlaz, duljina kabela: 5 cm
- 1x USB-A, utikač – priključak za prijenosno računalo, napajanje, duljina kabela: 12 cm
- 1x gumb Connect – jednostavno dijeljenje

- 1x LED indikator statusa
- Bežični standard: IEEE 802.11 b/g/n/ac, 2,4 GHz/5 GHz, 2T2R
- AES 128-bitno šifriranje
- WPA2/WPA-PSK/WPA2-PSK autentifikacija
- Latencija: približno 100 ms
- Podržava Windows i macOS
- Kompresija: H.264
- Stambeno zbrinjavanje: ABS
- Dimenzije: D 8,0 x Š 8,0 x V 1,4 cm
- Boja: siva/crna
- Bilješke:
- Domet prijenosa u uvjetima ograničene vidljivosti ne može se univerzalno odrediti i ovisi o lokalnim uvjetima.
- Zidovi, staklo itd. smanjuju pokrivenost signala ili uzrokuju gubitak signala.

Attributes

- KVM: Ne
- PoE (napajanje preko Ethernet): Ne



Package contents

- 1x bežični HDMI predajnik
- 1x priručnik

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	30	8.37	21.00	48.00	26.50	26,712.00
Packaging Unit Inside	1	0.28	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.28	11.00	19.00	2.80	585.20
Net single without Packaging	1	0.09	8.00	8.00	1.40	0.00

More images:

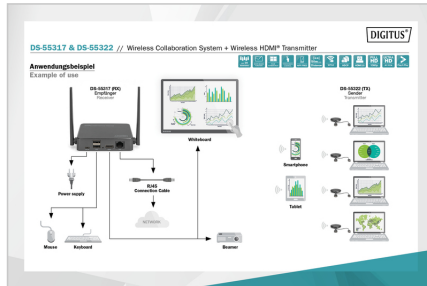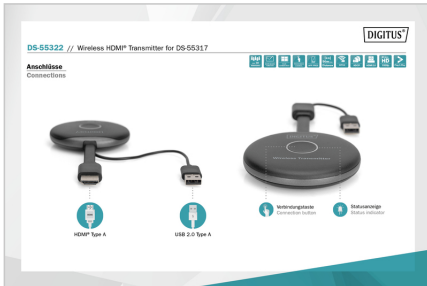

Safety notes

- Observe all warnings and instructions for the appliance.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Before commissioning, make sure that the device is switched off and is in a safe environment.
- During thunderstorms, damage can occur to connected electrical devices due to overvoltage caused by lightning.
- Do not operate the appliance during thunderstorms.
- Disconnect the appliance from connected electrical devices during thunderstorms.
- Only use the device indoors.
- Return the device to your dealer for repair.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.
- To completely disconnect the system from the power supply, you must unplug the power supply unit from the socket. You can disconnect the device from the power supply via the power supply unit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH

Auf dem Schüffel 3

Lüdenscheid, Germany

<https://www.assmann.com>

info@assmann.com