

DIGITUS® Carrinho de apresentação de TV

DA-90452

EAN 4016032487364



Carrinho de apresentação de TV, 70-120" 140 kg máx., preto

O Collaboration Trolley oferece um suporte de ecrã robusto e resistente para ecrãs de 70-120 polegadas com uma capacidade de carga máxima de 140 kg. O carrinho tem também um suporte de câmara regulável em altura e uma prateleira para computadores portáteis, leitores, etc. O carrinho pode ser posicionado de forma flexível e possui um guia de cabos integrado e pegas práticas na parte de trás. A construção é feita de alumínio, aço e plástico ultra-resistente e leve. Ideal para salas de conferências, salas de formação, salas de exposições e outros locais de eventos.

O carrinho de colaboração / carrinho de apresentação oferece a possibilidade de posicionamento flexível de um ecrã (70-120", 140 kg máx.)

- Tamanho do ecrã: 70" - 120"
- Capacidade de carga: 140 kg

- Compatibilidade VESA: 200x200, 300x200, 400x200, 300x300, 400x300, 400x400, 600x400, 800x400, 800x600, 1000x600
- Número de ecrãs: 1
- Gama de inclinação: +5° a -10°
- Altura: 125 - 160 cm
- Suporte da câmara: capacidade de carga de 5 kg, ajustável em altura
- Prateleira: capacidade de carga de 10 kg, regulável em altura
- Gestão de cabos: Sim
- Material: alumínio, aço, plástico
- Acabamento da superfície: Revestimento em pó
- Cor: Preto mate
- Dimensões (máx.): L 125 x P 76 x A 233,3 cm
- Peso: 35,1 kg


Package contents

- 1x carrinho de colaboração / carrinho de apresentação de TV
- 1x instruções de montagem

Logistics

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|------------------------------|--------------|-------------|------------|------------|-------------|------------|
| Packaging Unit Carton | 1 | 39.16 | 68.00 | 117.50 | 29.00 | 231,710.00 |
| Packaging Unit Inside | 1 | 39.16 | 68.00 | 117.50 | 29.00 | 231,710.00 |
| Packaging Unit Single | 1 | 39.16 | 68.00 | 117.50 | 29.00 | 231,710.00 |
| Net single without Packaging | 1 | 35.10 | 76.00 | 125.00 | 233.30 | 0.00 |

More images:

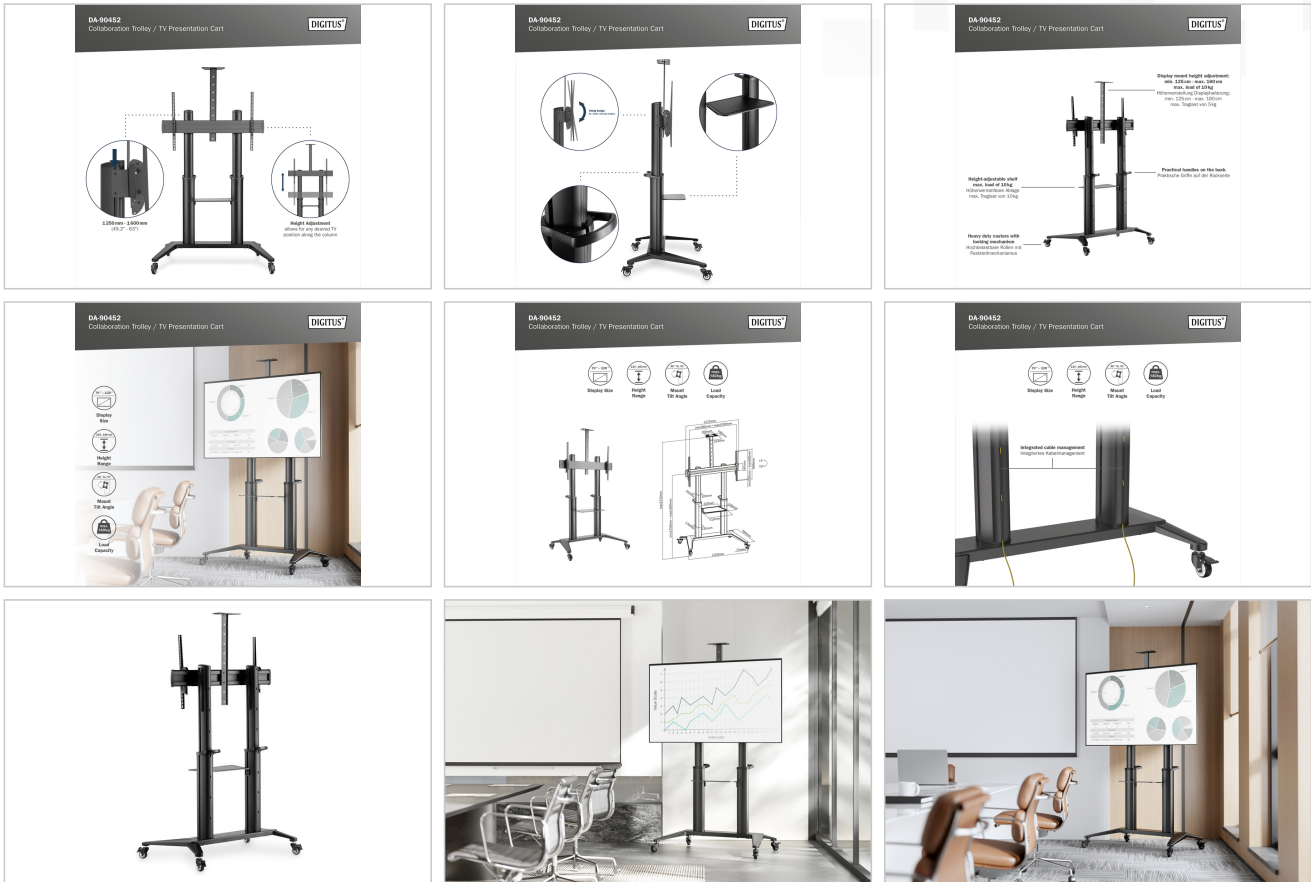

Safety notes

- Observe all warnings and instructions for the appliance.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Before commissioning, make sure that the device is switched off and is in a safe environment.
- During thunderstorms, damage can occur to connected electrical devices due to overvoltage caused by lightning.
- Do not operate the appliance during thunderstorms.
- Disconnect the appliance from connected electrical devices during thunderstorms.
- Only use the device indoors.
- Return the device to your dealer for repair.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.
- To completely disconnect the system from the power supply, you must unplug the power supply unit from the socket. You can disconnect the device from the power supply via the power supply unit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
 info@assmann.com