DIGITUS® Mobile Charging Cabinet for 16 Tablets Up to 13 Inches, USB-C

DN-45007

EAN 4016032494553



Charging trolley, 13", USB-C, electronic PIN lock 16 charge bases, fan, 384 x 550 x 375 mm

The DIGITUS® mobile charging cabinet is the ideal, compact solution for storing and charging your portable devices, such as laptops and tablets. Mobile charging cabinets are often used in public facilities, such as schools, to securely store devices in a central location while charging them at the same time. The cabinet features 16 charging slots, each with its own USB port on the front. A built-in fan (24 V), combined with ventilation slots, ensures active cooling of the cabinet.

The ideal solution for storing and charging your portable devices

- Front door with an all-metal frame and safety glass
- Electronic combination lock with a PIN code
- 180° door opening angle
- Includes 4 casters (2 of which are lockable)
- Includes handles for easier mobility
- Product dimensions (H x W x D) in mm: 384 x 550 x 375 mm
- On/Off switch on the front panel
- C20 & USB ports on the back
- Includes 30 mA residual current device (RCD)
- The product is delivered fully assembled
- Depth of the inner shelf: 330 mm (fits devices up to 13")
- USB-C Port Output: 20W max (9V 2.2A/12V 1.67A) per port; 320W max total
- Temperature Control: Fans start automatically when the internal temperature exceeds 40 °C
- Fan noise level: 45 dB
- Blue plastic brackets can be removed if necessary
- Material of the casters: PP

Attributes

- Boja: crna, RAL 9005
- Suitable for display size: 33 cm (13")
- Number of Devices: 16
- USB connection (charging): USB C
- Additional connection (charging): no
- UV-C disinfection: Ne
- Data synchronisation function: Ne
- Type: Trolley
- Locking type: electronic

Package contents

- Mobile Charging Cabinet
- Power cable
- User Manual

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	18.00	42.00	50.00	66.00	138,600.00
Packaging Unit Inside	1	18.00	42.00	50.00	66.00	138,600.00
Packaging Unit Single	1	18.00	42.00	50.00	66.00	138,600.00
Net single without Packaging	1	17.83	55.00	37.50	38.40	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.


More images:









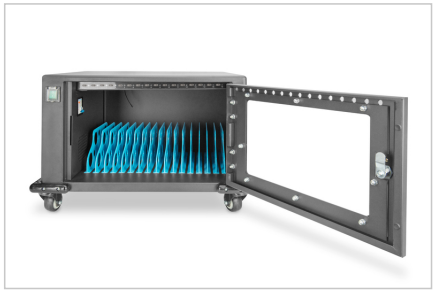





Safety notes

- The product may only be operated on sockets that are protected by a residual current circuit breaker.
- The electrical connection of the product must be made directly to a permanently installed socket.
- The use of multiple sockets or extension cables is not permitted.
- The connection cable must be undamaged. A cable with kinks, crushing or cracks must be replaced immediately.
- Before connecting electrical devices to the product, ensure that the device to be connected, including its connection cable, is in a fault-free and damage-free condition.
- Always insert the plug fully into the socket. It may only be disconnected by pulling on the plug itself - never pull on the cable.

- When operating doors or flaps, care must be taken to ensure that the connecting cables of electrical devices are not crushed or damaged
- Use only in dust and moisture-protected indoor areas
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Avoid moisture, dust or vapors, solvents, flammable gases.
- The appliance may only be dismantled and transported if the mains plug has been disconnected beforehand.
- Only connect the charging system to an earthed and easily accessible socket.
- Safety must be assessed by a qualified electrician.
- The sockets may only be used with the devices intended for this purpose, for example:
- Chargers for rechargeable batteries and hand-held devices
- Smartphones or tablets (mobile devices)
- Laptops / Notebooks / UltraBooks (mobile computers)
- Mobile batteries / PowerBanks
- Please ensure that the maximum total output specified on the rating plate is not exceeded.
- Please also ensure that no liquids enter the electrical equipment of the cabinet.
- Only charge devices under supervision. Long-term storage of any devices with Li-ion batteries is not permitted.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com