

DIGITUS® USB Charger 20W, 1x USB-C, 1x USB-A

DA-10300

EAN 4016032505808



USB Charger, 20W 1x USB-C, 1x USB-A, White

The compact 20 watt USB charger combines modern design with pioneering technology and a clear focus on sustainability. Equipped with a powerful USB-C port (up to 20 watts) and a USB-A port (up to 18 watts), it offers maximum flexibility for a wide range of devices. Even when both ports are used at the same time, the charger delivers up to 15 watts of total power - ideal for charging a smartphone and headphones in parallel, for example. Thanks to its sophisticated design and efficient technology, the charger is particularly reliable. Compared to conventional models, it impresses with its compact design and solid energy utilization - ideal for travel, the office or everyday use at home. A special highlight: the housing is made from 98% recycled PCR (post consumer recycling) material and the packaging is 100% plastic-free, making it a sustainable choice for environmentally conscious users. The universal compatibility makes the charger an all-rounder for smartphones, tablets, Bluetooth headphones, etc. Simply plug in and charge carefree - that's how easy modern energy supply is. With its robust, space-saving design, the charger fits in any bag and is always ready to hand, whether on a business trip, on vacation or on the go in everyday life. A charger that combines performance, safety and sustainability in a compact format - for those who expect more.

20 W power for fast, safe charging of two devices simultaneously - compact, efficient and ideal for at home and on the go.

- Maximum power with single connection: USB-C max. 20W, USB-A max. 18W
- Multi-device charging (2 port) USB-C + USB-A: 15W max.
- Plastic housing made from 98% recycled PCR material
- Plastic-free packaging
- Protection against overcurrent, short circuits and overheating
- Input voltage/rated current/frequency: 100-240V / 0.8A / 50/60Hz
- Average active efficiency: 85.5 %
- Power consumption in standby: 0.1W
- Product color: White
- Dimensions: 3.9 x 8.4 x 2.7 cm
- Weight: 57 g

Attributes



- Style: Charger/Power supply

Package contents

- USB charger
- Operating instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	40	5.06	34.00	40.00	22.00	29,920.00
Packaging Unit Inside	20	2.53	19.50	37.00	16.50	11,904.80
Packaging Unit Single	1	0.13	9.30	16.50	3.60	552.42
Net single without Packaging	1	0.06	8.40	2.70	3.90	0.00

More images:

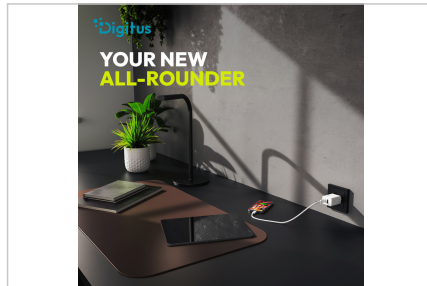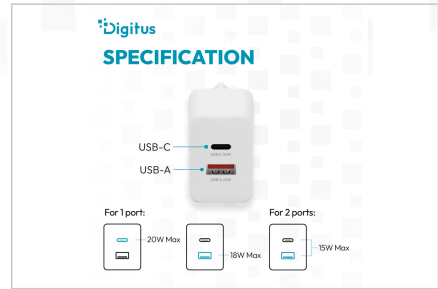

Safety notes

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com