

# DIGITUS Active USB 3.2 Gen2 10G extension cable, USB-C - USB-A, 5m

DA-73113

EAN 4016032497431



## Active USB-C Extension Cable, 5m 10G, USB 3.2 Gen2, USB-C - USB-A (M/F)

The active USB 3.2 Gen2 cable extension from Digitus extends the range of your USB devices by 5 meters and still enables fast data transfers of up to 10 Gbit/s. Suitable for your devices such as memory sticks, tablets or smartphones - even over longer distances without any loss of speed. This cable is ideal for conference/meeting rooms, if you want to connect your webcam or if you need to connect a USB device at a greater distance, such as a multifunctional hub with various interfaces, or devices that are difficult to reach. Simply plug and play your notebook/PC with USB-C connection to the cable of your end device. No more connection problems with longer USB cable connections!

**The Digitus USB 3.2 Gen2 active extension extends the cable length of a USB 3.2 device by 5m and ensures a fast data transfer rate of 10 Gbit/s over the entire length.**

- Cable length: 5 m
- Extends the maximum permissible USB cable length by 5 m
- Connection 1: USB-C plug


- Connection 2: USB-A socket
- Data transfer rates: up to 10 Gbit/s (USB 3.2 Gen2, Super Speed+)
- Complies with the USB 3.2 Gen2 specification, backwards compatible with USB 2.0 / 1.1
- Supports USB Low Speed (1.5 Mbit/s), Full Speed (12 Mbit/s), High Speed (480 Mbit/s), Super Speed (5 Gbit/s) and Super Speed + (10Gbit/s)
- Plug & Play
- Signal amplification: Integrated active signal amplifier
- Chipset: MCDP6200C1
- AWG: 28/28/24
- Supports Windows 10/8/7/Vista/XP/2003/2000, macOS X, Linux
- Compatibility: Suitable for all devices with USB-A connection
- Shielding: Double
- Color: Black

### Package contents

- 1 x Active USB 3.2 Gen2 extension cable 5m
- 1 x QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	0	0.00	0.00	0.00	0.00	0.00
Packaging Unit Inside	0	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	0	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	2.43

**More images:**

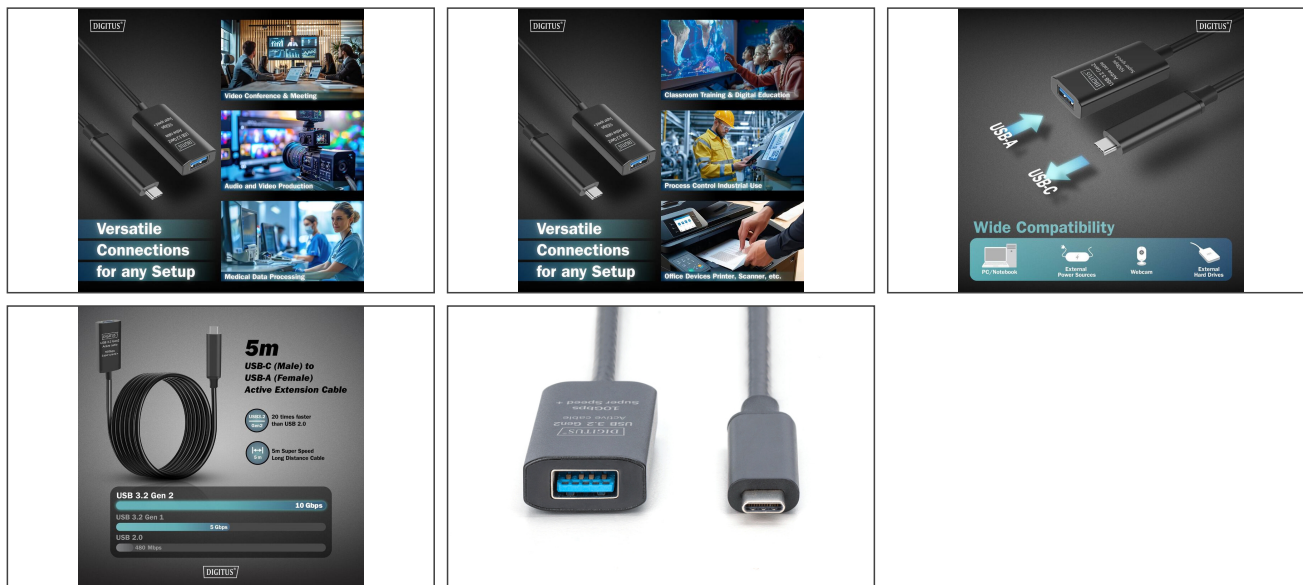

**Safety notes**

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)