
# DIGITUS® Fiber Optic Multimode Patch Cord, OM 3, LC / SC

**DK-2532-03/3**

**EAN 4016032249597**

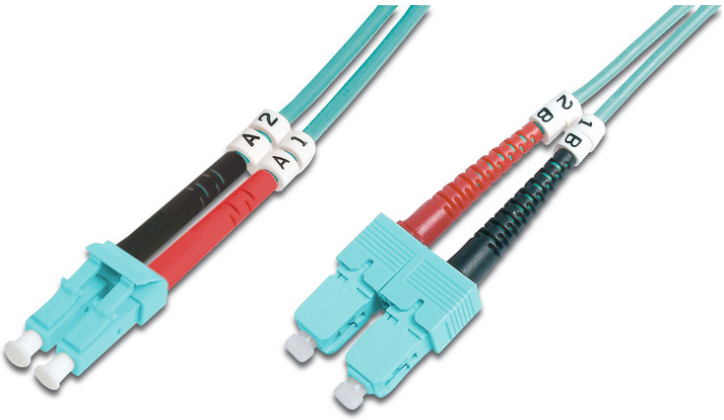


**FO patch cord, duplex, LC to SC MM OM3 50/125 µ, 3 m**

FO patch cord, duplex, LC to SC,MM OM3 50/125 µ, 3 m

**Future-oriented standards and high-end quality for your network.**

- Duplex cable
- LSOH
- Connector with ceramic ferrule
- Cable diameter 2 mm
- Single packed with test-report

**Attributes**

- Assortment: Fiber Optic Patch Cables
- Boot: two-color
- Cable diameter: 2 mm
- Cable type: I-VH 2G50/125µ
- Color cable: aqua
- Connector 1: LC
- Connector 2: SC
- Fiber class: OM3
- Fiber diameter: 50/125µ
- Mode: Multimode
- Packaging: DIGITUS Polybag
- Length: 3 m


**Logistics**


| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 120 | 8.89 | 41.00 | 41.00 | 28.00 | 47,068.00 |
| **Packaging Unit Inside** | 15 | 1.11 | 19.00 | 19.00 | 12.00 | 4,332.00 |
| **Packaging Unit Single** | 1 | 0.07 | 17.00 | 17.00 | 1.00 | 289.00 |
| **Net single without Packaging** | 1 | 0.07 | 15.00 | 15.00 | 1.00 | 0.00 |



Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**

| | | | | |
|---|---|---|---|---|
| Part No. | DK-2532-03/3 | | | |
| Lenght | 3 m | | | |
| Cable Type | Duplex MM 50/125 | | OM3 LSZH | |
| | END A | | END B | |
| Connector Type | LC | | SC | |
| Insertion Loss (dB) | 0.17 | 0.1 | 0.14 | 0.08 |
| Return Loss (dB) | 32.2 | 39.2 | 34.9 | 35.3 |
| Q.C. | PASS | | | |

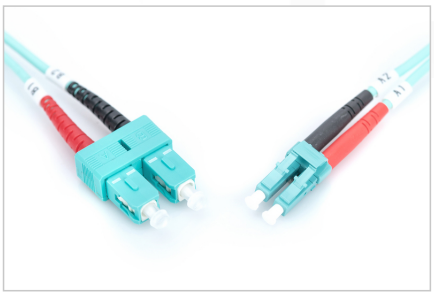

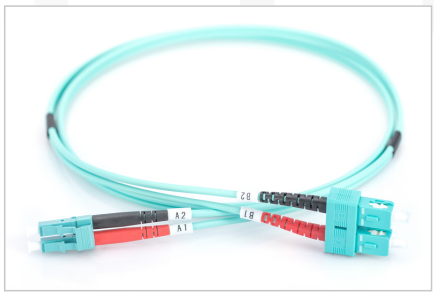

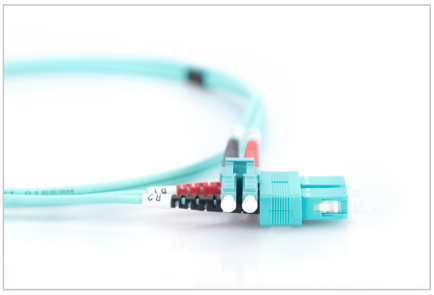

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.