

# Digitus® USB 2.0 connection cable

AK-300101-050-S

EAN 4016032282617



## USB 2.0 connection cable, type A M/M, 5.0m, USB 2.0 conform, bl

For connection of external USB devices (with A socket) to the USB Host (e.g. PC, Notebook or USB Hub). Datatransferrate up to 480 Mbps (High-Speed).

**Allows a reliable and fast connection of external USB devices with the PC, also about longer distances.**


### Attributes

- Assortment: USB Cables
- AWG: 28

- Color cable: black
- Color connector: black
- Connector 1: USB A, plug
- Connector 2: USB A, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- Hoods: molded
- USB compliance: USB 2.0
- Wire material: CU
- Length: 5 m
- Shielding: Double shielding

| Logistics                           |              |             |            |            |             |                 |
|-------------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                                     | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| <b>Packaging Unit Carton</b>        | 140          | 14.58       | 32.00      | 45.00      | 25.00       | 36.000.00       |
| <b>Packaging Unit Inside</b>        | 10           | 1.04        | 26.00      | 28.00      | 35.00       | 25.480.00       |
| <b>Packaging Unit Single</b>        | 1            | 0.10        | 2.50       | 11.50      | 21.00       | 603.75          |
| <b>Net single without Packaging</b> | 1            | 0.09        | 2.50       | 13.00      | 12.00       | 0.00            |

### More images:

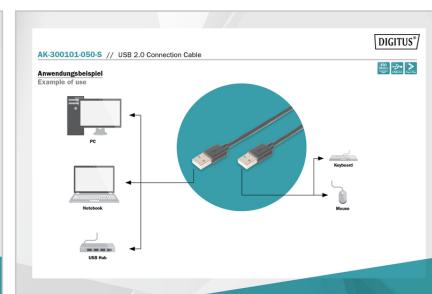

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
info@assmann.com