

# DIGITUS® USB-A - Mini-B connection cable, 1.8m

AK-300108-018-S  
EAN 4016032282907



**USB 2.0 connection cable, type A - mini B (5pin) M/M, 1.8m, USB 2.0 conform, bl**

For connecting external USB end devices (with Mini B (5-pin) socket, e.g. MP3 player, smartphone or external hard disk housing) to the USB host (e.g. PC, notebook or USB hub). Transfer rate up to 480 Mbps (high-speed).

**Enables reliable and fast connection of external USB devices to the PC.**



- Data transfer rate up to 480MB/s
- Power supply up to 5V/0.5A and 2.5W
- Copper cores, foil and braid shielded for robustness and a reliable connection

**Attributes**

- Asortiman: USB kabeli
- AWG: 28
- Feritni filter: nema
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: USB A, utikač
- Konektor 2: Mini USB B, 5-polni, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- USB sukladnost: USB 2,0
- Duljina: 1.8 m
- oklop: dvostruki oklop

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 300          | 13.58       | 25.00      | 45.00      | 32.00       | 36,000.00       |
| Packaging Unit Inside        | 10           | 0.45        | 36.00      | 27.00      | 5.00        | 4,860.00        |
| Packaging Unit Single        | 1            | 0.05        | 21.00      | 11.50      | 0.50        | 120.75          |
| Net single without Packaging | 1            | 0.04        | 10.50      | 11.00      | 1.50        | 0.00            |

**More images:**

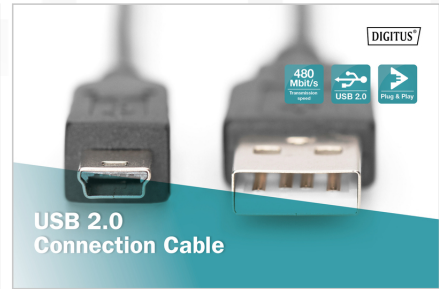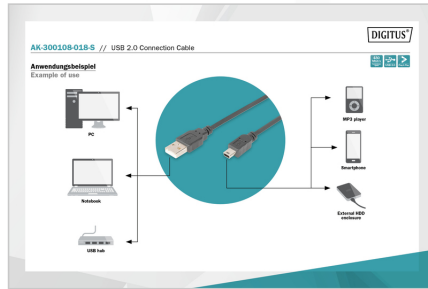

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)