


DIGITUS® Cabo da ranhura USB

AK-300301-002-E

EAN 4016032283423

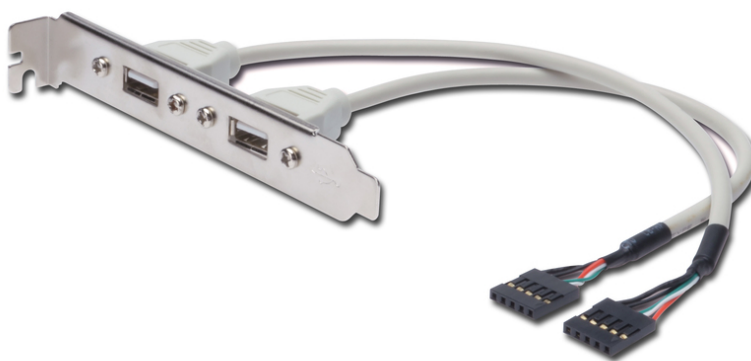

Cabo de suporte USB, 2x tipo A - 2x5 pinos IDC, Bu/Bu,0,25m, compatível com USB 2.0, be

Estabelece a ligação entre as interfaces USB na placa-mãe e as entradas USB externas no suporte da ranhura. Taxa de transferência até 480 Mbps (alta velocidade).

Permite a ligação fiável e rápida de dispositivos USB externos ao PC, mesmo a longas distâncias.

Attributes

- Assortment: USB Cables

- AWG: 28
- Color cable: beige
- Color connector: beige
- Connector 1: 2 x USB A, jack
- Connector 2: 2 x IDC (5-pin), connector
- Connector surface: nickel-plated
- Hoods: molded
- USB compliance: USB 2.0
- Wire material: CU
- Length: 0.25 m
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	5.90	38.00	31.00	22.00	25,916.00
Packaging Unit Inside	10	0.59	22.00	20.00	6.00	2,640.00
Packaging Unit Single	1	0.06	15.50	13.50	2.50	523.13
Net single without Packaging	1	0.05	12.30	10.50	2.00	0.00

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com