


DIGITUS® USB-A - Micro-B connection cable, 1m

AK-300110-010-S
EAN 4016032285793

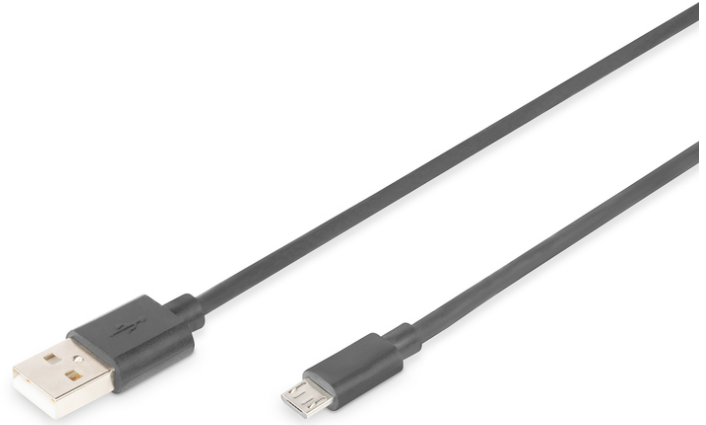

USB 2.0 connection cable, type A - micro B M/M, 1.0m, USB 2.0 conform, bl

For connecting external USB end devices (with Micro B socket, e.g. MP3 player, smartphone or external hard disk housing) to the USB host (e.g. PC, notebook or USB hub). Transfer rate up to 480 Mbps (high-speed).

Enables reliable and fast connection of external USB devices to the PC.

- Data transfer rate up to 480MB/s
- Power supply up to 5V/0.5A and 2.5W
- Copper cores, foil and braid shielded for robustness and a reliable connection



Attributes

- Assortment: USB Cables

- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: USB A, plug
- Connector 2: Micro USB B, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- Hoods: molded
- Packaging: Polybag
- USB compliance: USB 2.0
- Wire material: CU
- Length: 1 m
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	500	13.58	32.00	45.00	25.00	36,000.00
Packaging Unit Inside	10	0.27	24.00	21.00	3.00	1,512.00
Packaging Unit Single	1	0.03	0.80	9.20	19.60	144.26
Net single without Packaging	1	0.03	0.50	10.50	8.50	0.00

More images:

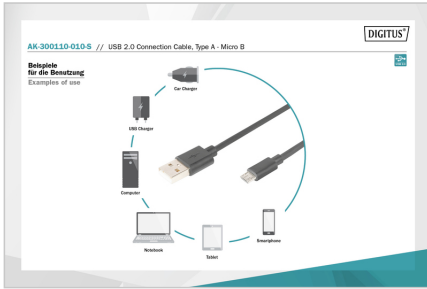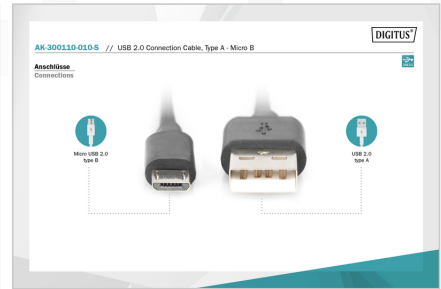

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com