

DIGITUS® DisplayPort

AK-340100-050-S
EAN 4016032288978



DisplayPort connection cable, DP M/M, 5.0m, w/interlock, Full HD 1080p, bl

Digitus DisplayPort connection cable, DP M/M, 5.0m, w/interlock, Full HD 1080p, bl. This cable is suitable for connecting two DisplayPort devices. It supports a maximum video resolution of 1080p and a bandwidth of 10.2 Gbps. The cable is black and has a length of 5.0 meters. It features interlocking connectors to prevent damage to the ports. The cable is made of copper-plated braided copper (CCS) and has triple shielding. It does not contain a ferrite filter. The connectors are black and have a snap fastener. The cable is packaged in a polybag. The wire material is CCS. The length is 5 m. AOC - Active Optical Cable: no. Shielding: triple shielding.

- Support 1080p
- Max. supported Video Resolution: 1080 p
- Supported transmission modes: RBR, HBR
- Maximal bandwidth: 10,2 Gbps
- HBR-Version/transfer mode: HBR (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3


Attributes

- Assortment: DisplayPort Cables
- AWG: 30

- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DP, plug
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: 1080p
- Hoods: molded
- Interlock: Snap fastener
- Packaging: Polybag
- Wire material: CCS
- Length: 5 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	30	7.88	51.00	34.00	21.00	36,414.00
Packaging Unit Inside	5	1.31	6.00	32.00	33.00	6,336.00
Packaging Unit Single	1	0.26	20.00	19.00	4.50	1,710.00
Net single without Packaging	1	0.22	17.00	16.50	4.00	0.00

More images:

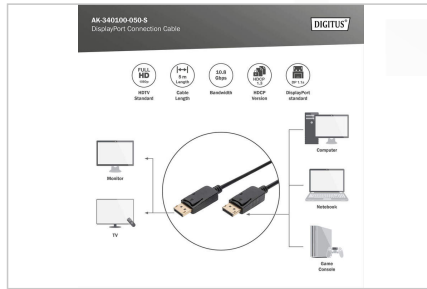

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com