

DIGITUS DisplayPort Adapter Cable

DB-340407-001-W
EAN 4016032292456



DisplayPort Adapter Cable, Type mini DP - HD15 M/F, 0.15m, Full HD, DP 1.1a, wh

This cable suits for example ideal to connect a MacBook®, MacBook Air®, MacBook Pro®, iMac®, Mac Mini® and Mac Pro® to a VGA Monitor, beamer, LCD/TFT monitor with a VGA Monitor cable.

Clear and sharp display - Full HD resolution

- Max. supported video resolution: 1920 x 1080 p with 60 Hz
- Maximum bandwidth: 10.8 Gbps
- HBR version/transfer mode: HBR1 (2.70 Gbit/s per lane)
- HDCP version: HDCP 1.3

Attributes



- Assortment: DisplayPort Cables

- AWG: 32
- Color cable: white
- Color connector: white
- Connector 1: Mini DP, plug
- Connector 2: HD15, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- HDTV Standard: Full HD
- Hoods: molded
- Wire material: CU
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	1.31	37.50	11.50	27.00	11,643.80
Packaging Unit Inside	10	1.31	37.50	11.50	27.00	11,643.80
Packaging Unit Single	1	0.13	3.50	10.00	25.50	892.50
Net single without Packaging	1	0.09	2.00	6.00	20.00	0.00

More images:

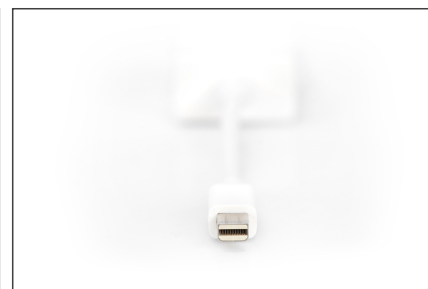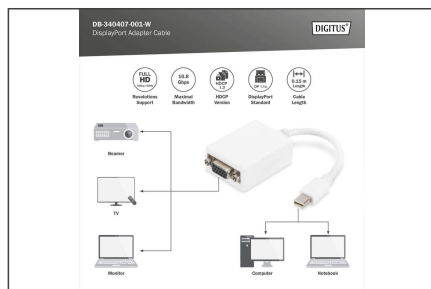

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com