

Digitus® Mini DisplayPort Adapter - DisplayPort, HDMI + DVI

AK-340509-002-W
EAN 4016032292555



DisplayPort Converter Cable, miniDP- DP,HDMI,DVI M/F, 0.2m, DP1.1a , wh

This 3in1 cable suits ideal to connect a MacBook, MacBook Air, MacBook Pro, iMac, Mac mini and Mac Pro to a Beamer, LCD/TFT Monitor, LED or Plasma-TV with DP, HDMI type A or DVI interface, for example. A concurrent use of the DP, HDMI type A or DVI data link is not possible! The display resolution depends on the used connection. The DP and HDMI output supports Audio for iMac (End 2009) and MacBook Pro (Mid 2010). Automatic display recognition.

No need to buy 3 single adapter


- Support up to 1080p with 60Hz
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3

Attributes

- Assortment: DisplayPort Cables
- AWG: 32
- Color cable: white
- Color connector: white
- Connector 1: Mini DP, plug
- Connector 2: DP, jack + HDMI type A, jack + DVI-D, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: none
- Packaging: Polybag
- Wire material: CU
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	5.70	40.00	30.20	18.00	21,744.00
Packaging Unit Inside	10	0.57	21.00	24.00	7.00	3,528.00
Packaging Unit Single	1	0.06	20.00	15.00	1.62	486.00
Net single without Packaging	1	0.05	28.70	6.00	1.50	0.00

More images:

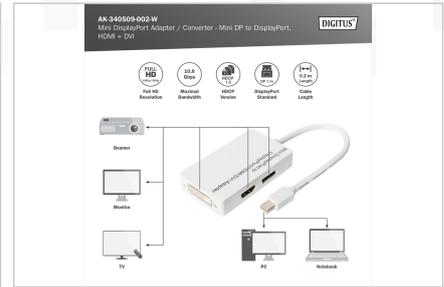

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com