

# DIGITUS® Cabo de ligação CAT 6 S/FTP

DK-1644-005/G

EAN 4016032321583



**Cabo de ligação CAT 6 S-FTP, cobre, LSZH AWG 27/7, comprimento 0,5 m, cor verde**

Os cabos de ligação DIGITUS® Categoria 6 Classe E são fabricados e testados de acordo com a norma ISO/IEC 11801 e DIN EN 50173 CAT 6. Os cabos de ligação DIGITUS® garantem que a instalação dos cabos está em conformidade com a especificação ISO & EN Channel e oferecem um excelente desempenho na cablagem DIGITUS® CAT 6. A nova manga anti-torção com proteção da alavanca de fecho evita que os cabos fiquem presos e, ao mesmo tempo, protege a alavanca de fecho de se partir. A cor vermelha das fichas facilita a identificação da Categoria 6.

**Padrões orientados para o futuro e qualidade de topo de gama para a sua rede.**

- 2x ficha RJ45 (8P8C)
- Capotas com proteção contra dobras, alívio de tensão e proteção da alavanca de fecho





- Designação do comprimento nas capotas
- Conductor interno: Cobre (Cu)

**Attributes**

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 0.5 m
- Color: green
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	180	5.70	36.00	36.00	22.00	28,512.00
Packaging Unit Inside	10	0.32	14.00	8.00	13.00	1,456.00
Packaging Unit Single	1	0.03	110.00	0.50	12.00	660.00
Net single without Packaging	1	0.02	50.00	1.20	1.30	0.00

**More images:**

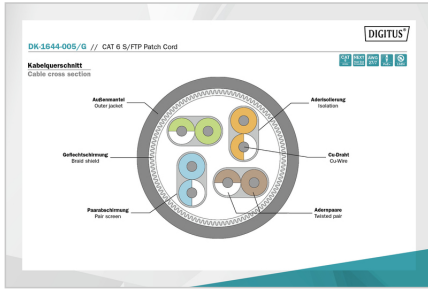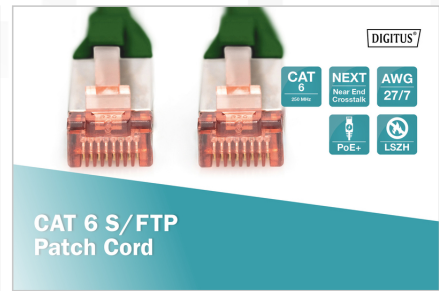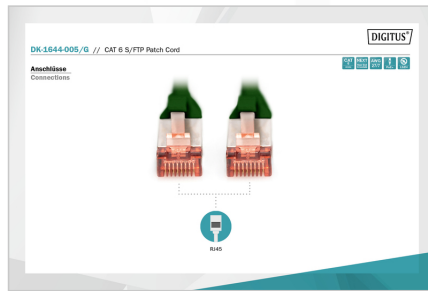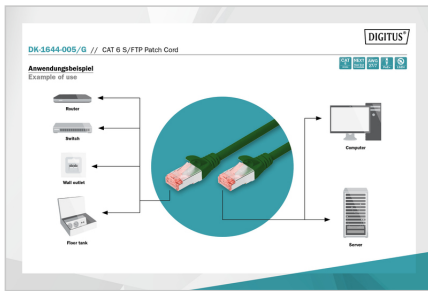

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)