


DIGITUS® Adaptador / conversor Mini DisplayPort - HDMI

AK-340411-001-W

EAN 4016032328599

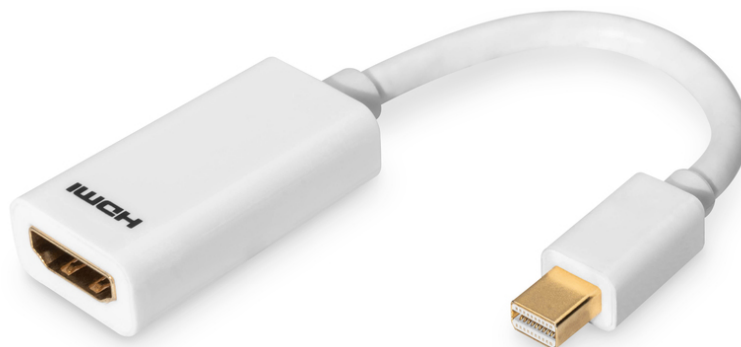

Cabo adaptador DisplayPort, tipo mini DP - HDMI tipo A St/Bu, 0,15m, DP 1.1a, branco

Este adaptador/conversor de vídeo/áudio HD digital é ideal para ligar um MacBook®, MacBook Air®, MacBook Pro®, iMac®, Mac Mini® e Mac Pro® a um monitor ou projetor HDMI, monitor LCD/TFT, televisor LED ou plasma através de um cabo HDMI.

Utilize o seu monitor HDMI existente com um novo dispositivo miniDP

- Suporta resoluções HDTV até 1920 x 1200p a 60 Hz
- Modos de transmissão suportados: RBR, HBR, HBR2
- Largura de banda máxima: 10,8 Gbps
- Versão HBR/modo de transferência: HBR1 (2,70 Gbit/s por via)
- Versão HDCP: HDCP 1.3


Attributes

- Assortment: DisplayPort Cables

- AWG: 32
- Color cable: white
- Color connector: white
- Connector 1: Mini DP, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: none
- Resolution max.: 1920 x 1080 Pixel, 60Hz
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	200	8.60	50.00	33.00	22.00	36,300.00
Packaging Unit Inside	10	0.43	1.00	16.00	24.00	384.00
Packaging Unit Single	1	0.04	1.00	16.00	24.00	384.00
Net single without Packaging	1	0.04	1.00	16.00	24.00	0.00

More images:

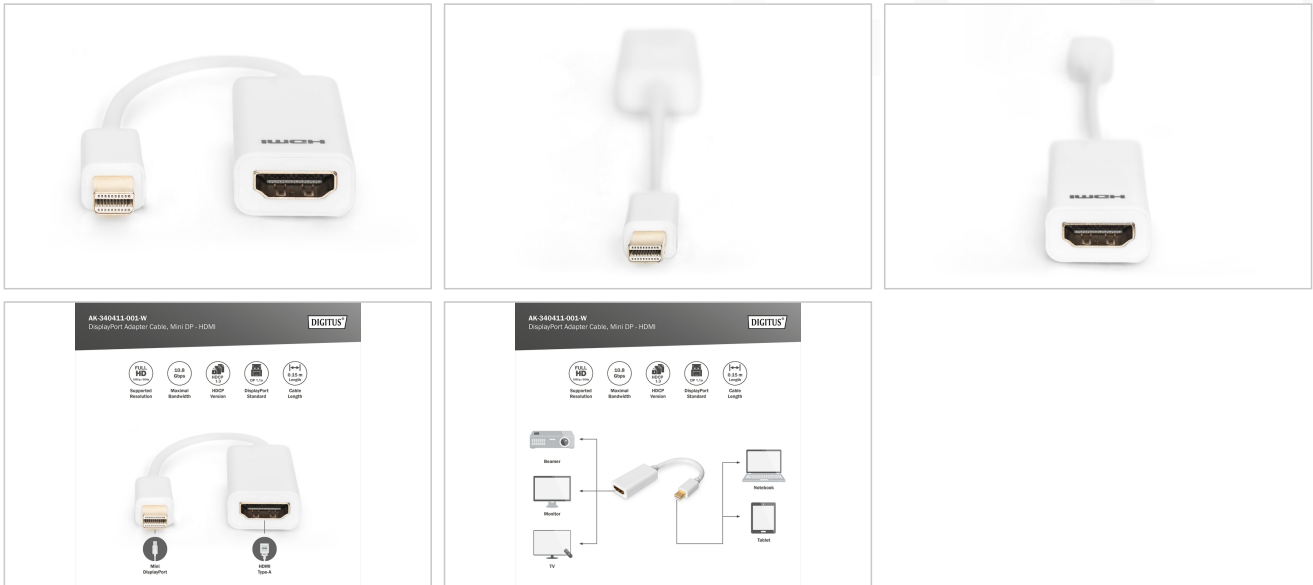

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com