

DIGITUS® DIGITUS Unique - 600 x 800

DN-19 26U-6/8-B-1
EAN 4016032332268




26U network rack, Unique 1342x600x800 mm, color black (RAL 9005)

The DIGITUS Unique network rack is a 26U rack with a depth of 800 mm and a width of 600 mm. It is made of steel and has a black finish (RAL 9005). The rack is designed for use in server rooms and data centers. It features a glass front door and a steel rear door with a cable entry. The rack is compatible with 19-inch standard equipment. The maximum load capacity is 1200 kg. The rack is mounted on 4 leveling feet. The rack is made of steel and has a black finish (RAL 9005). The rack is designed for use in server rooms and data centers. It features a glass front door and a steel rear door with a cable entry. The rack is compatible with 19-inch standard equipment. The maximum load capacity is 1200 kg. The rack is mounted on 4 leveling feet.

- IP protection class: IP20
- Front door: Glass door, single opening
- Rear door: Steel door and cable entry, single opening
- Side panels: Both sides
- Units: 26
- Width: 600 mm
- IP protection class: IP20
- Mounted: yes
- Package contents
 - Earthing cable set
 - Installation set (screws, cage nuts, washers)
 - 2 x key
 - 4 x leveling foot, M10

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	70.80	85.00	65.00	139.20	769,080.00
Packaging Unit Inside	1	70.80	85.00	65.00	139.20	769,080.00
Packaging Unit Single	1	70.80	85.00	65.00	139.20	769,080.00
Net single without Packaging	1	69.80	80.00	60.00	134.20	0.00

More images:

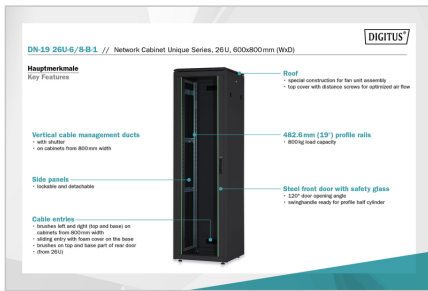

Safety notes

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be neatly routed and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com