


DIGITUS® Cabo de ligação de fibra ótica, MPO, tomada, OS2, método A, 20m

DK-2966-20

EAN 4016032345213

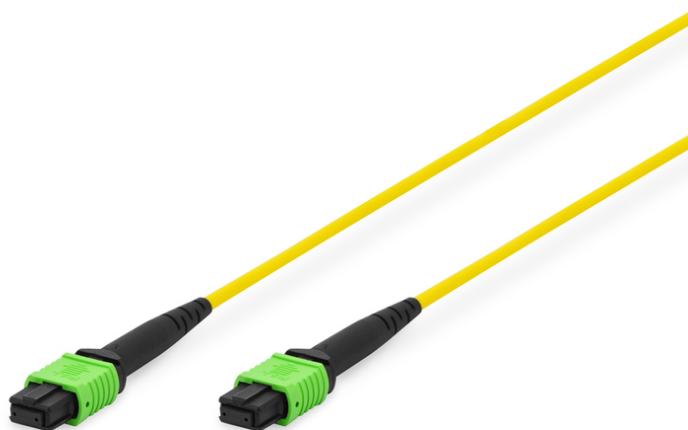

Cabo de ligação de fibra ótica DIGITUS, MPO para MPO, fêmea OS2, monomodo 09/125 µ, 20m, método A

O cabo de ligação MPO permite taxas de dados de 40Gb/s ou 100Gb/s e é a resposta às crescentes larguras de banda exigidas pelos centros de dados. O conector MPO normalizado IEC61754-7 e TIA/EIA 604-5 garante o melhor desempenho em toda a rede e é pouco maior do que um conector RJ45 normal. A excelente atenuação e o design compacto fazem deste cabo de ligação a primeira escolha quando se trata de largura de banda e desempenho.

Soluções de alto desempenho para conectividade eficiente e escalável em centros de dados.

- Ficha: tomada MPO
- Junta de terra: APC
- Tipo: Método A
- Tipo de fibra: SM-G652D, 9/125µ, OS2
- Número de fibras: 12
- Diâmetro exterior do cabo: 3 mm
- Cor da pelagem: Amarelo
- Comprimento do cabo: 20 m

- Material do casaco exterior: LSZH
- Máximo. Resistência à tração: 300 N
- Raio de curvatura mínimo: 30 mm
- Gama de temperaturas: -40°C a +75°C

Attributes

- Cable diameter: 3 mm
- Cable jacket: LSOH
- Color cable: yellow
- Fiber class: OS2
- Fiber diameter: 9/125µ
- Mode: Singlemode
- Number of connectors side 1: 1
- Number of connectors side 2: 1
- Number of fibers: 12
- Length: 20 m

Package contents

- 1 x cabo de ligação de fibra ótica, MPO, tomada, OS2, método A, 20m

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	60	9.71	40.00	40.00	30.00	48,000.00
Packaging Unit Inside	1	0.16	2.50	20.00	29.00	1,450.00
Packaging Unit Single	1	0.16	2.50	20.00	29.00	1,450.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.

- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com