


DIGITUS® Cisco-compatible mini GBIC (SFP) Module, 1.25 Gbps, 20km

DN-81001-02

EAN 4016032369974

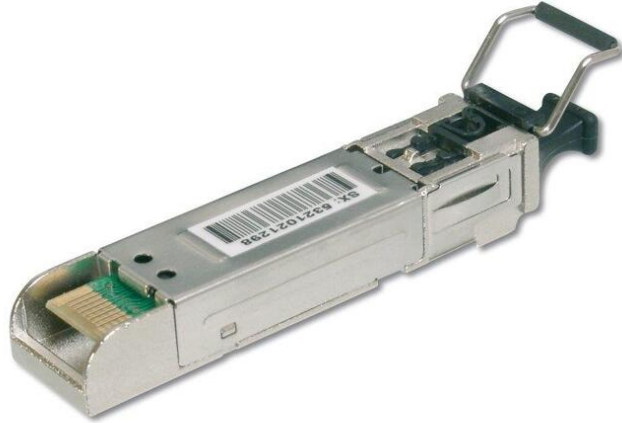

1.25 Gbps SFP Module, Singlemode, Cisco-compatible LC Duplex Connector, 1310nm, up to 20km, Cisco

Digitus® Mini GBIC (SFP) (Source Agreement) Plug and Play

Plug and Play

- Digitus Mini GBIC SFP (Source Agreement)
- Digitus Mini GBIC SFP (Source Agreement) Plug and Play
- Digitus Mini GBIC SFP (Source Agreement) 1,25 Gbps/μ
- Digitus Mini GBIC SFP (Source Agreement) IEEE 802.3z
- Digitus Mini GBIC SFP (Source Agreement) EN 60825-1
- Digitus Mini GBIC SFP (Source Agreement) Plug and Play
- Digitus Mini GBIC SFP (Source Agreement) MSA (Source Agreement)
- Digitus Mini GBIC SFP (Source Agreement) LC

- 1000Base-LX - Digitus Mini GBIC SFP
- Digitus Mini GBIC SFP: 1310 nm
- Digitus Mini GBIC SFP (Source Agreement) - 8 km
- Digitus Mini GBIC SFP (Source Agreement) - 24 km
- Digitus Mini GBIC SFP (Source Agreement) 20 km
- Digitus Mini GBIC SFP (Source Agreement) 09/125μm
- Digitus Mini GBIC SFP (Source Agreement) 3,3 μ
- Digitus Mini GBIC SFP (Source Agreement): 0-70 °C

Attributes

- DDM Support: no

Package contents

- Digitus SFP

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	100	5.80	54.50	37.50	21.00	42,918.80
Packaging Unit Inside	1	0.06	11.50	9.50	3.00	327.75
Packaging Unit Single	1	0.06	11.50	9.50	3.00	327.75
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials

- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com