

DIGITUS® USB 3.0 Type-C to A Adapter, Type-C to A

AK-300506-000-S
EAN 4016032370802



USB Type-C adapter, type C to A M/F, 3A, 5GB, 3.0 Version, black

Digitus USB Type-C to A Adapter, 3A, 5GB, 3.0 Version, black (AK-300506-000-S) is a high-quality USB Type-C to A adapter, designed for connecting USB Type-C devices to USB Type-A ports. It features a black plastic housing and a blue USB Type-C port on one end, and a silver-plated USB Type-A port on the other. The adapter is compatible with USB 3.0 and USB 2.0 devices, and it supports data transfer speeds up to 5 Gbps. It also supports power delivery (PD) up to 3A. The adapter is made of molded plastic and is unshielded. It is compliant with USB 3.0 / 3.1 and has a length of 0.03 m. It is not a USB-C product.

Digitus USB Type-C to A Adapter, 3A, 5GB, 3.0 Version, black

- Supports data transfer speeds up to 5 Gbps / s - 10 Gbps / s
- Supports data transfer speeds up to 3 A
- Supports data transfer speeds up to USB PD (Power Delivery).
- Supports Type-C, USB PD (Power Delivery).
- Supports USB 2.0 / 1.1



- Assortment: USB Cables
- Color cable: black
- Type: USB Type-C to A
- Color connector: black
- Connector 1: USB C, plug
- Connector 2: USB A, jack
- Connector 3: USB 2.0
- Connector surface: nickel-plated
- Hoods: molded
- USB compliance: USB 3.0 / 3.1
- Length: 0.03 m
- Shielding: Unshielded
- USB-C Products: yes

Attributes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1000	6.60	44.00	33.00	22.00	31,944.00
Packaging Unit Inside	10	0.07	8.50	6.00	8.00	408.00
Packaging Unit Single	1	0.01	2.00	0.50	3.50	3.50
Net single without Packaging	1	0.01	3.20	1.40	0.40	0.00

More images:



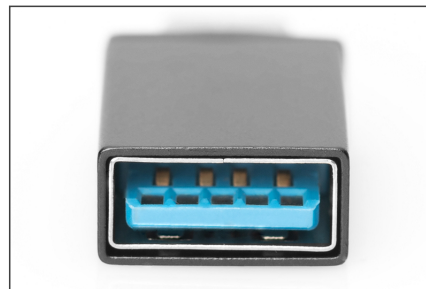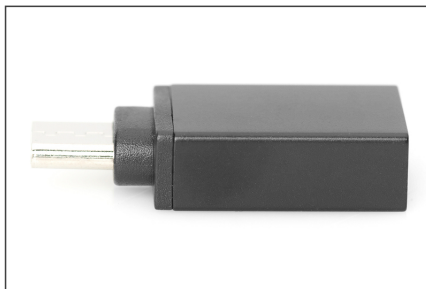

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com