

DIGITUS® CAT 6, U-UTP patch cord, Cu, LSZH AWG 26/7, length 5 m, color black

DK-1617-050/BL
EAN 4016032387916



CAT 6 U-UTP patch cord, Cu, LSZH AWG 26/7, length 5 m, color black

DIGITUS® CAT 6 U-UTP patch cord, Cu, LSZH AWG 26/7, length 5 m, color black. This patch cord is designed for high-speed data transmission and is compliant with the ISO/IEC 11801 standard. It features a 4-pair twisted pair structure and is suitable for use in a variety of network environments. The patch cord is made of high-quality copper conductors and is protected by a flame-retardant LSZH jacket. The RJ45 connectors are made of high-quality plastic and are designed for easy insertion and removal. The patch cord is available in a length of 5 meters and is packaged in a standard retail box.

- 2 RJ45 (8P8C)
- 250 MHz
- 100% LSZH
- 100% Cu




Attributes

- Assortment: Twisted Pair Patch Cables

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Retail Poly Bag
- Category: CAT 6
- Shielding: U-UTP, unshielded
- Length: 5 m
- Color: black
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	70	10.00	46.00	32.00	27.00	39,744.00
Packaging Unit Inside	10	1.43	20.00	30.00	36.00	21,600.00
Packaging Unit Single	1	0.14	2.00	17.00	25.00	850.00
Net single without Packaging	1	0.12	500.00	1.20	1.30	0.00

More images:

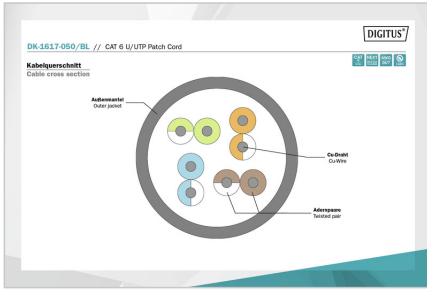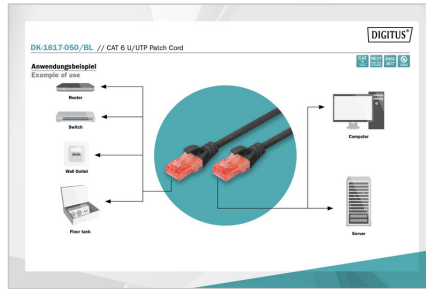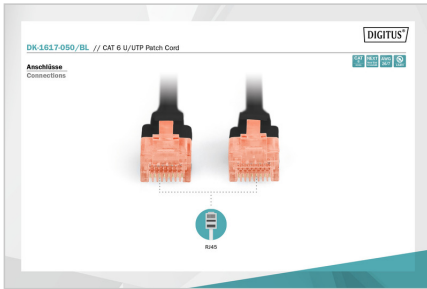

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com