


DIGITUS® SFP+ 10 Gbps Bi-directional Module, Singlemode, TX1270/RX1330, 10km

DN-81204

EAN 4016032424260

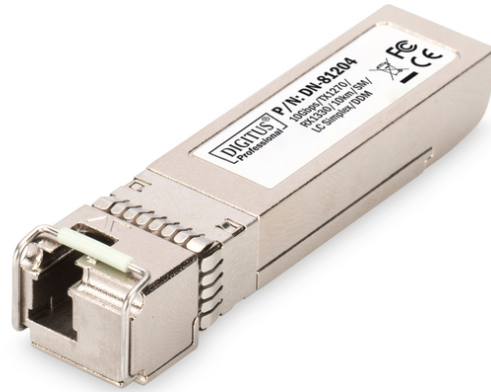

10G SFP+ Module, Singlemode, BiDi, DDM LC Simplex Connector, Tx1270/Rx1330, up to 10km

Digitus® Mini GBIC (SFP) is a high-speed optical transceiver module designed for use in network switches and routers. It supports 10 Gbps bi-directional communication over singlemode fiber optic cables. The module is compatible with a wide range of network equipment and is designed for easy installation and use. Operating temperature range: 0-70 °C.

Plug and Play

- Compatible with: Allied Telesis, Alinet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Connector: LC
- Wavelength: WDM — 1270nm Tx / 1330nm Rx
- Distance: 10km
- Compliance: EN 60825-1
- Plug and Play
- Manufacturer compatibility: MSA (Multi-Source Agreement)

- Operating temperature range: 0-70 °C
- Dimensions: 3.3 x 1.25 x 0.5 cm

Attributes

- Mode: Singlemode
- Connector: LC
- Distance (km): 10
- Wavelength: 1270/1330 nm
- DDM Support: yes
- Broadcasting Mode: Biidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: 10 Gigabit

Package contents

- 10G SFP+ Module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	7.00	55.00	39.50	25.50	55,398.80
Packaging Unit Inside	1	0.06	11.70	9.30	3.20	348.19
Packaging Unit Single	1	0.06	11.70	9.30	3.20	348.19
Net single without Packaging	1	0.03	6.00	0.80	1.00	0.00

More images:**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com