

DIGITUS® USB-C 3.1 Gen2, USB-C

AK-300139-010-S
EAN 4016032426011



USB Type-C connection cable, type C to C/M, 1.0m, Gen2, 5A, 10GB, 3.1 Version, CE, bl


- 10GB/s 数据传输速率 (最高可达 10GB/s, 最高可达 10GB/s)
- 支持 USB 3.1 10Gbps/5Gbps, Superspeed+
- 支持 USB 3.1 10Gbps/5Gbps, Superspeed+
- 支持 USB PD (最高支持 20V/5A, 100W)
- 支持 USB PD (最高支持 20V/5A, 100W)
- 支持 DisplayPort

- AWG: 30
- Color cable: black
- Color connector: black
- Connector I: USB C, plug
- Connector II: USB C, plug
- Connector surface: nickel-plated
- Wire material: CU
- Length: 1m
- Shielding: Double shielding

Attributes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	200	11.80	44.00	33.00	22.00	31,944.00
Packaging Unit Inside	10	0.59	40.00	35.00	7.60	10,640.00
Packaging Unit Single	1	0.06	25.00	13.50	1.30	438.75
Net single without Packaging	1	0.05	10.00	10.00	1.30	0.00

More images:

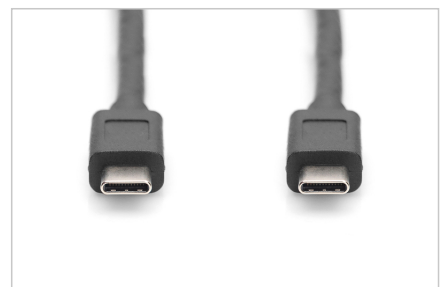



Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com