


DIGITUS® Painel frontal da caixa de emenda de fibra ótica, fecho de libertação rápida, 12x LC DX, SC SX, E2000 SX

DN-96206-QL

EAN 4016032458395

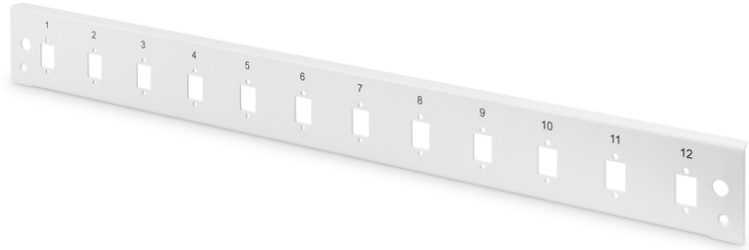

Painel frontal de fibra ótica, 1U, fecho de libertação rápida, 12x LC DX SC SX, E2000 SX, vertical, cor cinzenta (RAL 7035)

A caixa de emenda pré-montada Digitus é uma caixa de proteção pronta a instalar, concebida para uma gestão segura e organizada dos pontos de emenda de fibra ótica. As caixas de emenda pré-montadas propostas estão equipadas com componentes pré-instalados e são, por isso, ideais para uma utilização rápida e eficiente em redes de fibra ótica. A pré-montagem elimina a necessidade de instalação manual dos componentes, o que reduz significativamente o tempo de instalação. São configurados de acordo com as normas da indústria e garantem consistência e fiabilidade em diferentes instalações de rede. Por conseguinte, oferecem uma combinação de conveniência, desempenho e durabilidade que os torna uma solução ideal para as modernas redes de fibra ótica.

A caixa de emenda de fibra pré-equipada permite uma instalação rápida, reduz o tempo de configuração e garante uma elevada fiabilidade, protegendo as emendas de fibra e minimizando a perda de sinal.

- Acoplamentos com manga de cerâmica e caixa de polímero
- Caixa de emenda extraível

Attributes

- Assembly: Splice Box
- Color: light grey, RAL 7035
- Number of fibers: 12
- Type: fixed


Package contents

- 1x painel frontal

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	50	16.00	46.00	16.00	16.00	11,776.00
Packaging Unit Inside	1	0.32	2.50	45.00	5.50	618.75
Packaging Unit Single	1	0.32	2.50	45.00	5.50	618.75
Net single without Packaging	1	0.19	1.50	43.00	4.40	0.00

More images:

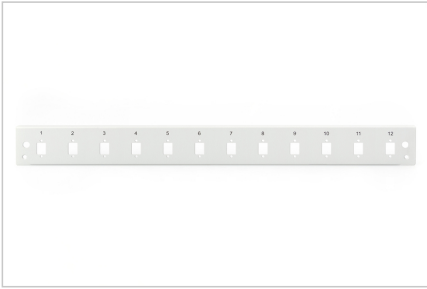

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com