

# DIGITUS® Comutador de rede Fast Ethernet de 8 portas, industrial, não gerido, 1 ligação ascendente RJ45

DN-650106

EAN 4016032458821



## Comutador Fast Ethernet industrial de 8 portas Calha DIN, gama de temperaturas alargada

O Interruptor Industrial Fast Ethernet DIGITUS® foi concebido para ambientes agressivos, nos quais está exposto à humidade, às variações de temperatura e às vibrações. Com uma gama de temperaturas de -40°C a 80°C, o Industrial Fast Ethernet Switch pode ser utilizado nas condições mais adversas. A disponibilidade constante é garantida em áreas altamente sensíveis, como transporte, produção, tráfego e monitorização de segurança. Graças ao sistema simples plug-and-play, o Industrial Fast Ethernet Switch pode ser rapidamente integrado no respetivo ambiente. Graças à sua conectividade Fast Ethernet, o Industrial Fast Ethernet Switch é uma solução flexível e económica para ambientes industriais.

## Soluções industriais robustas e duradouras com montagem em calha standard e top-hat

- 8 x 10/100Base-TX portas Ethernet
- Detecção automática de cabos - Função Auto MDI / MDI-X
- Normas suportadas: IEEE 802.3 10BaseT, IEEE 802.3u 100BaseTX
- Controlo de fluxo e contrapressão IEEE802.3x
- Tecnologia store-and-forward para uma transferência de dados otimizada
- Detecção/definição automática de velocidade e half/full duplex
- Placa traseira com 1,6 Gbps
- Memória de endereços MAC 2K

- Caixa metálica compacta e robusta
- Excelente proteção contra curto-circuitos
- Proteção contra raios e sobretensões
- Fonte de alimentação redundante: 12-48 V CC, fonte de alimentação redundante com função de proteção contra inversão de polaridade
- Gama de temperaturas de funcionamento alargada, -40 °C ~ +80 °C
- Ligação de terminal amovível
- Grau de proteção: IP40
- Consumo de energia: <5 watts

### Attributes


- Number of ports: 8
- Ethernet speed: Fast Ethernet
- Industrial usage: yes
- Installation type: DIN rail
- Managed: no
- Number of ports (Uplink): 1
- Outdoorsuitable: no
- PoE (Power over Ethernet): no
- Protection against vandalism: no
- VLAN: no

### Package contents

- Comutador Fast Ethernet industrial de 8 portas
- Guia de início rápido

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	14	11.65	46.50	39.50	24.00	44,082.00
Packaging Unit Inside	1	0.83	15.40	21.30	6.70	2,197.73
Packaging Unit Single	1	0.83	15.40	21.30	6.70	2,197.73
Net single without Packaging	1	0.64	10.10	14.30	4.40	0.00

**More images:**

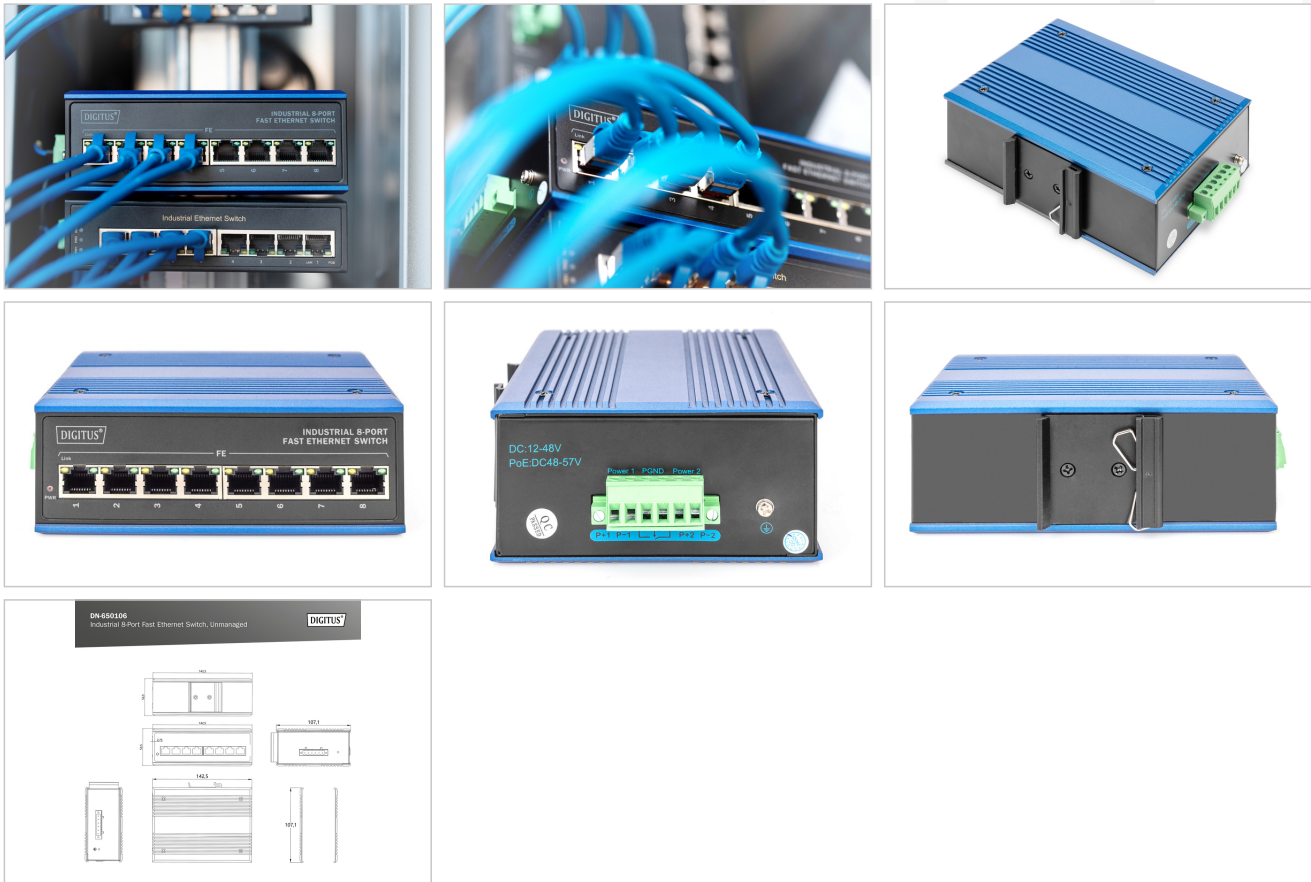

**Safety notes**

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and send it to an authorized service centre for repair
  - The mains cable, power supply unit or plug for the power supply is damaged or worn;
  - Liquid has penetrated the appliance;
  - The device has been exposed to rain or water;
  - The device has been dropped or the housing has been damaged;
  - The function of the device has obviously changed;
  - The appliance cannot be operated as described in the operating instructions.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)