

# DIGITUS® LWL Unibox para montagem na parede, compacta

DN-96800S-2

EAN 4016032466093



## Montagem em parede de fibra ótica Unibox, compacta 265 x 150 x 55 mm, cinzento (RAL 7035)

A Unibox de fibra ótica é uma caixa de emenda robusta e compacta para montagem na parede. Com suportes de acoplamento disponíveis separadamente, que podem ser montados em segundos, a caixa pode ser equipada individualmente com acoplamentos, pigtailed de fibra e cabos, conforme necessário. As áreas de aplicação incluem aplicações interiores de telecomunicações e comunicação de dados.

### Caixa de emenda compacta para montagem na parede

- Classe de proteção IP20
- Revestimento a pó em cinzento (RAL 7035)
- Dimensões do produto (A x L x P): 265 x 150 x 55 mm
- Peso: 1,3 kg (líquido); 1,4 kg (bruto)



### Package contents


- 1x Unibox
- 2x chave
- Material de fixação (parafusos, cavilhas, anilhas, abraçadeiras)

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.60	32.00	19.50	6.50	4,056.00
Packaging Unit Inside	1	0.60	32.00	19.50	6.50	4,056.00
Packaging Unit Single	1	0.60	31.00	19.00	6.00	3,534.00
Net single without Packaging	1	1.30	31.00	19.00	6.00	0.00

### More images:

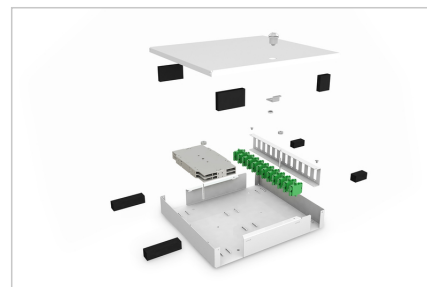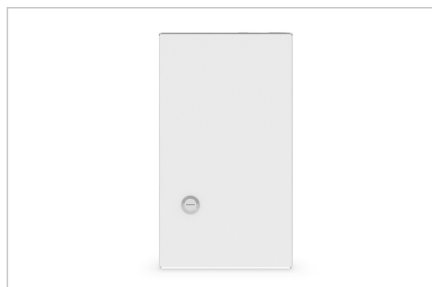

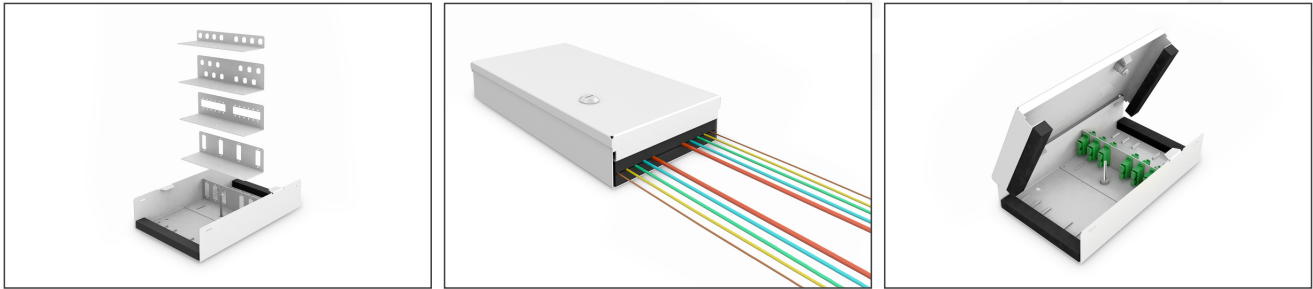

## Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)