

# DIGITUS® Pop-Out Video Monitor Wall Mount, 45-70"

DA-90446

EAN 4016032481935



### Pop-out Video Wall Mount 45-70" screen size, 70 kg max, anti-theft hole

DA-90446 provides a professional video wall solution while being universally compatible with a maximum load capacity of 70 kg / 154 lbs and max. VESA 600x400 hole pattern. Multi-dimensional micro-adjustment allows precise alignment of the video wall configuration including depth, height and tilt. This video wall mount features a quick-lock mechanism for easy installation and maintenance. The quick-lock mechanism holds the screens in place, thanks to a locking and unlocking system. It is the perfect solution for public and commercial displays with an anti-theft design (padlock required).

### Pop-out function: Provides quick access for installation and maintenance and allows precise alignment of your video walls

- Pop-out function - Quick access for installation and maintenance
- Supported screen sizes: 45" - 70"
- Maximum load capacity: 70 kg
- Fine adjustment: Depth 20 mm / height 25 mm
- Tilt range: +4° to -2°
- Screen level: +3° to -3°
- VESA compatibility: 200x200, 300x200, 400x200, 300x300, 400x300, 400x400, 600x400

- Precise display alignment: Height/depth adjustment
- Quick lock: Locks/unlocks the display
- Pop-out lock system: Ensures safety by preventing the possibility of accidental pop-out
- Anti-theft lock hole: For added security against unintentional removal (additional padlock required)
- Mounting: Wall installation
- Material: Steel
- Color: Black
- Surface: Powder coating
- Dimensions (folded): W 67 x D 52.4 x H 9.5 cm
- Weight: 10.55 kg

### Attributes






- Monitor weight (max.): 70 kg
- Mounting method: Wall-mount
- Number of monitors: 1

### Package contents

- 1 x Pop-Out Video Monitor Wall Mount
- 1 x Mounting material
- 1 x Installation instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	2	23.66	29.30	76.00	30.00	66,804.00
Packaging Unit Inside	1	11.83	27.10	74.00	13.80	27,674.50
Packaging Unit Single	1	11.83	27.10	74.00	13.80	27,674.50
Net single without Packaging	1	10.54	9.50	67.00	28.50	0.00

More images:

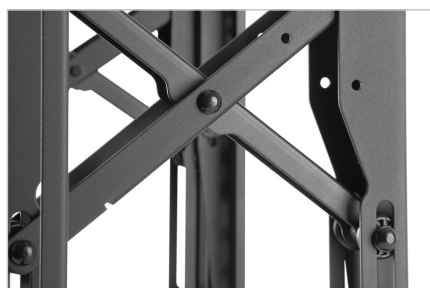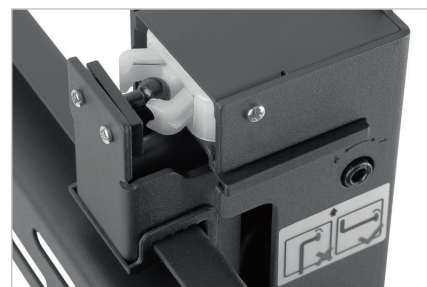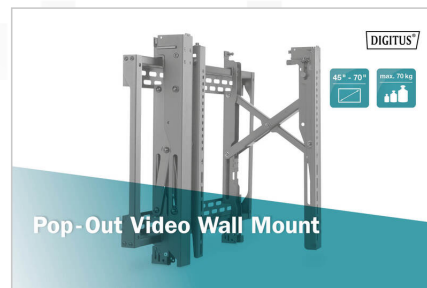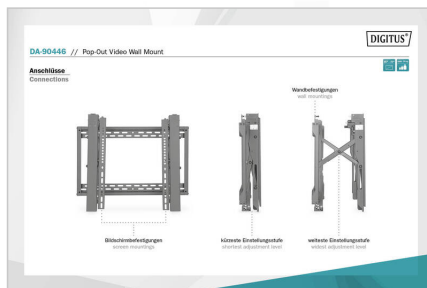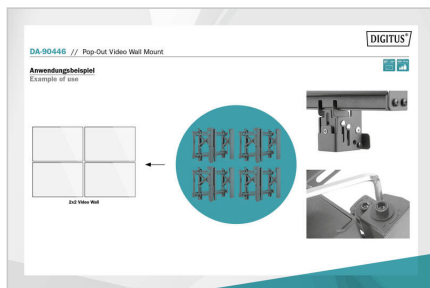

**Safety notes**

- Please read the entire manual before starting assembly and installation. Please contact your local dealer if you have any questions about the instructions or warnings.
- CAUTION: Use with products that exceed the permitted weight may result in damage or possible injury.
- Brackets should be fitted in accordance with the installation instructions. Incorrect installation can result in damage or injury.
- Use safety equipment and suitable tools. The product should only be installed by specialists.
- This product can be installed on timber-framed, solid concrete or stone walls.
- The load-bearing surfaces should be able to safely withstand the entire weight of appliances and all additional components.
- Only use the installation screws supplied and DO NOT TIGHTEN the screws TOO TIGHT.
- This product contains small parts that can cause a choking hazard if swallowed. Keep these parts away from children.
- Only use this product indoors. Using the product outdoors can lead to injuries and damage.
- IMPORTANT: Before installation, please check all components received against the components list. If parts are damaged or missing, ask your local dealer for replacement parts.
- MAINTENANCE: Check the bracket regularly for safety and stability (preferably every three months).

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)