

DIGITUS 10G OEO Mode Converter

DN-82212**EAN 4016032484165****10G Ethernet Mediakonverter SFP/SFP 1310nm /1550nm/CWDM/DWDM**

The DN-82212 10G Converter combines two 10 Gbps fiber optic connections, e.g. for switching from single mode to the multi-mode area, which act as fiber optic media converters or fiber optic repeaters for transmission over large distances. OEO for network backbone (SAN, LAN, MAN). Supports SDH/SONET STM-64/OC-192, 10G fiber channel, 10G ethernet etc. The DN-82212 10G Converter can be used in telecommunications rooms, R&D labs, data centers and more. 1310nm /1550nm/CWDM/DWDM optical wavelength conversion, supports loopback

The DN-82212 10G Converter combines two 10 Gbps fiber optic connections, e.g. for switching from single mode to the multi-mode area.

- Protocols: 8.5G fiber channel, SONET OC-192, SDH STM-64 (9.95 Gbps), 10G WAN (10 Gbps), 10G LAN (10.31 Gbps), OTN OTU-2 (G.709) (10.70 Gbps), 10G LAN with 255/237 FEC coding (11.09Gbps)
- 10G fiber channel (11.32Gbps), 10G POS

- Data transmission speed: 8.5 Gb/s-11.7 Gb/s
- Interface type: SFP+ to SFP+
- Transmission distance: up to 80 km
- Maximum package forwarding rate: 14,880,950/S
- LED instructions: PWR, SPD, LOS1, LOL2, LOS2, LOL2
- Electricity requirement: DC12V~48V, Power consumption: ≤4W
- Dimensions: 110(L)*96.5(W)*35(H)mm
- Operating temperature: -20 to 60°C
- Storage temperature: -40 to 85°C
- Humidity: 5% to 90% (non-condensing)

Attributes

- Industrial usage: no
- PoE injector: no


Package contents

- 1x Repeater/media converter
- 1 x Power adapter
- 1x User manual

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	6.00	49.00	27.00	30.00	39,690.00
Packaging Unit Inside	1	0.60	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.60	13.00	5.50	24.00	1,716.00
Net single without Packaging	1	0.30	11.00	2.60	9.50	0.00

More images:

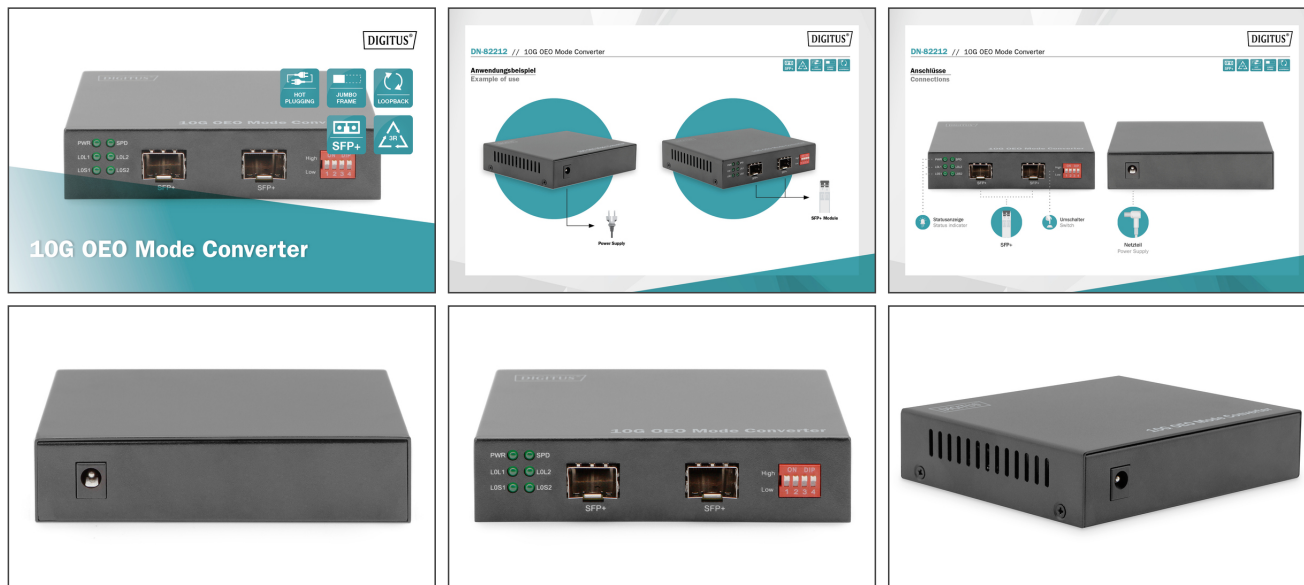

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com