DIGITUS® Dynamic-N series wall-mounted enclosure - 600x450 mm (WxD), unassembled

DN-37100

EAN 4016032488538



7U wall mounting cabinet, Dynamic 600 x 450 mm, unmounted, grey

Zidni komunikacijski ormari Dynamic Basic proizvedeni su od čvrste čelične konstrukcije. Vareni spojevi osiguravaju stabilnost. Bočni dijelovi mogu se skinuti, a ormar na zid možete jednostavno i brzo montirati. Zahvaljujući fleksibilnosti, ormari su idealni za sve trenutne IT i telekomunikacijske primjene.

The unassembled delivery of the wall-mounted enclosures ensures optimized transport options. Assembly can be carried out quickly and easily.

- Protection class IP20
- Lockable safety glass door with steel frame
- 230° door opening angle
- 1-point locking on the front door
- 483 mm (19") profile rails at the front and rear inside the enclosure, galvanized
- 483 mm (19") profile rails are adjustable in depth and marked with the height unit
- 1.0 - 1.2 mm robust sheet steel with high load-bearing capacity, powder-coated
- Cable entry possible at the rear, roof and base (pre-punched cut-outs)
- Roof is prepared to accommodate a fan element (punched-out mounts)
- Ventilation slots for active and passive ventilation
- 4 earthing points (base, side panel and front door) with protective cap
- Installation depth for components (standard maximum): 219 - 320 mm

Attributes

- Bočne ploče: Obje strane
- Boja: svijetlo siva, RAL 7035
- Dubina: 450 mm
- Jedinice: 7
- Kapacitet opterećenja: 60 kg
- Prednja vrata: Staklena vrata, jednostruko otvaranje
- Širina: 600 mm
- Stražnja vrata: Stražnja ploča
- Vrsta ormara: Zidni ormarić
- IP klasa zaštite: IP20
- Montirano: Ne

Package contents

- Earthing cable set
- Installation set (screws, cage nuts, washers)
- 2 x key
- Assembly instructions

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	17.00	52.00	65.00	28.00	94,640.00
Packaging Unit Inside	1	17.00	52.00	65.00	28.00	94,640.00
Packaging Unit Single	1	17.00	52.00	65.00	28.00	94,640.00
Net single without Packaging	1	14.80	45.00	60.00	38.50	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:













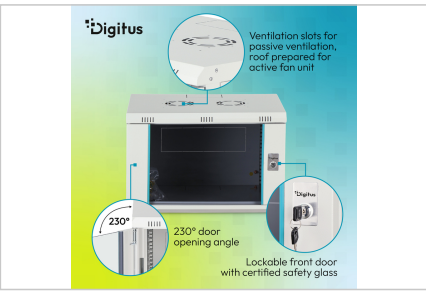

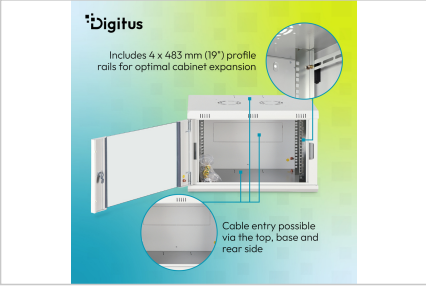



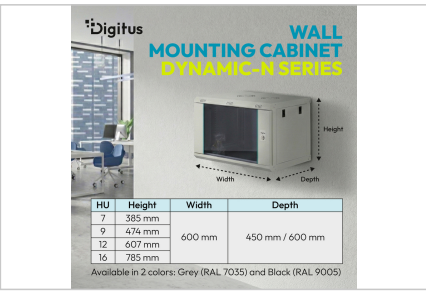



Safety notes

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com