

# DIGITUS® Cabo de ligação de silicone Lightning, USB-C - Lightning, 1 m, preto

AK-600110-010-S

EAN 4016032495963



## Cabo de carregamento USB de silicone, USB-C - Lightning 1m, USB 2.0, 60W, preto

Ligação fiável e fácil dos seus dispositivos USB-C ao seu PC graças ao cabo de silicone macio e flexível. Taxa de transferência de dados de 480 Mbits/s para sincronização e transferência de dados e uma especificação de fornecimento de energia de 60 W para carregamento.

### Carregamento e sincronização rápidos com o cabo de ligação de silicone macio e de alta qualidade

- Suporta taxas de transferência de dados de 480 Mbit/s
- Retrocompatível com USB 2.0 e USB 1.1
- Suporta a função de fornecimento de energia USB com 20V, 3A e 60W
- Cabo durável com uma vida útil de até 25.000 curvas (com base em testes internos)

- A ficha tipo C pode ser utilizada em ambos os lados
- Certificado por IFM


### Attributes

- AWG: 22
- Color cable: black
- Connector 1: Apple Lightning 8-pin, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Hoods: molded
- Wire material: CU
- Length: 1 m
- Shielding: single shielding

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	7.90	21.00	32.00	50.00	33,600.00
Packaging Unit Inside	10	0.40	3.60	24.00	30.00	2,592.00
Packaging Unit Single	1	0.04	1.00	21.00	11.50	240.29
Net single without Packaging	1	0.03	0.90	12.00	10.00	0.00

**More images:**

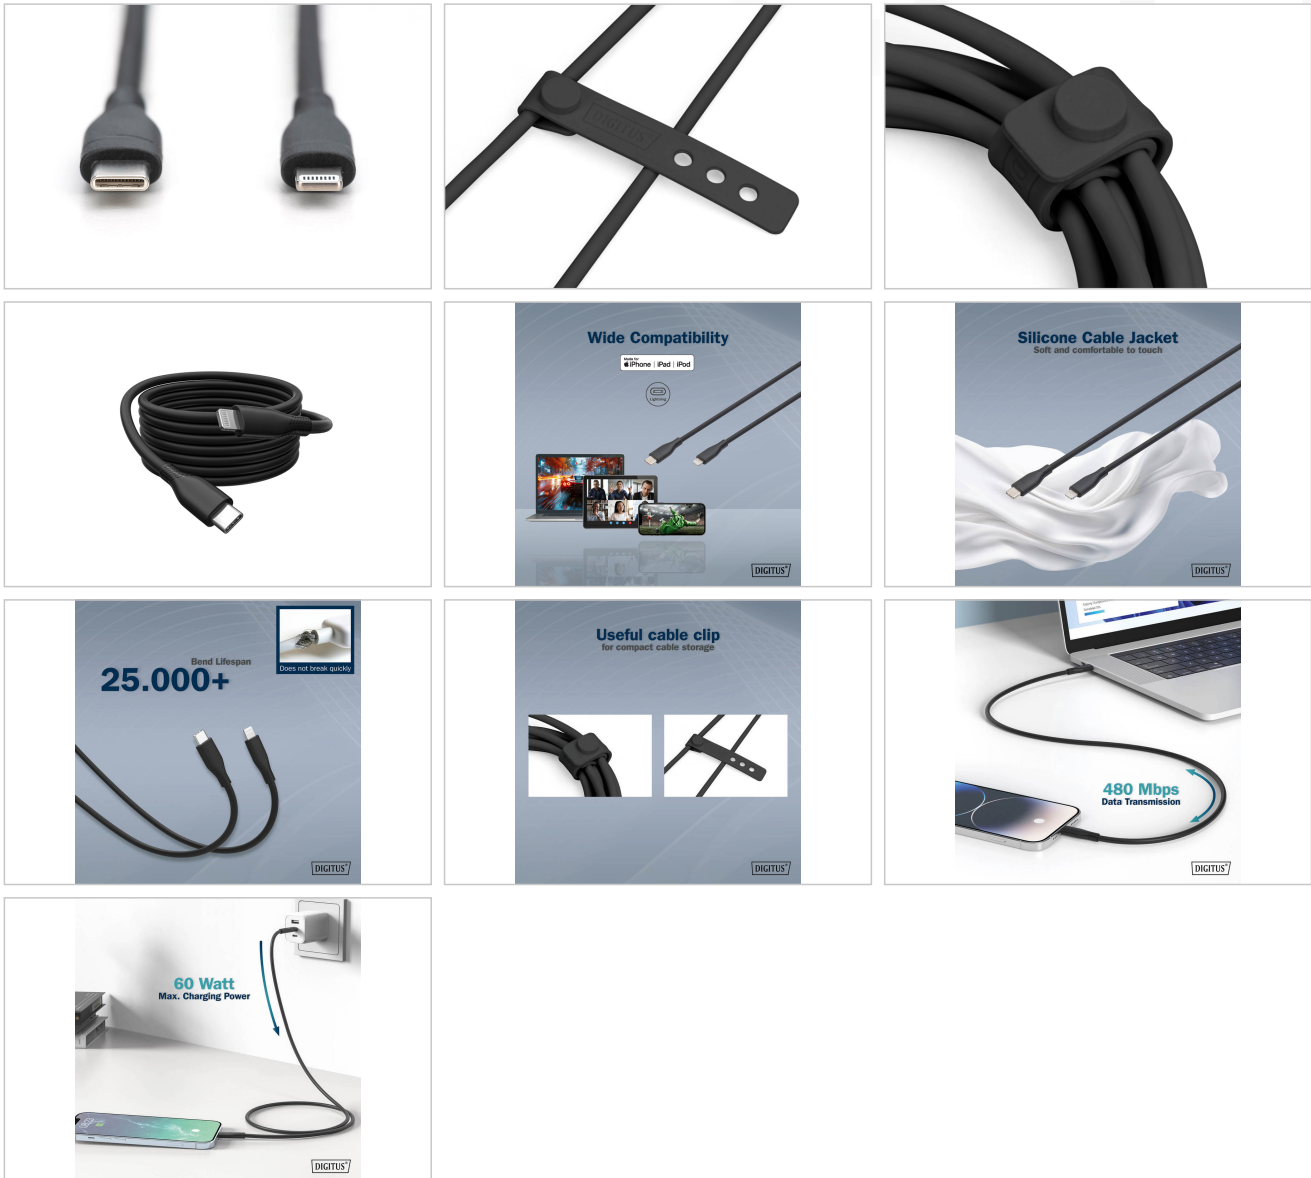

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)