


# DIGITUS Modular plug for round cable, shielded, 100 pcs.

DN-MO-8-8-SRS  
EAN 4016032499398

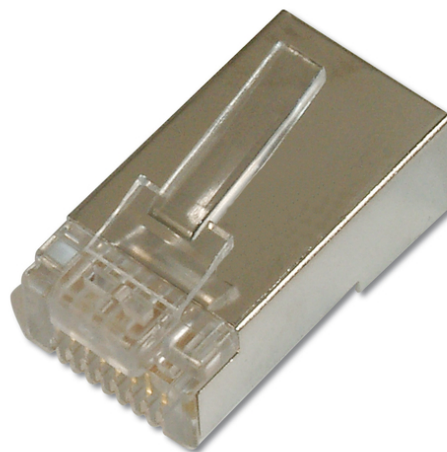

## Modular Plug, for stranded Round Cable, 8P8C shielded, 100 pcs. packr

### Modular plug, 8P8C, shielded for solid conductor round cable two-piece plug

- Performance characteristics: CAT 5e, 10/100Base-T, 1GBase-T
- Areas of application: Patch cable assembly
- Standards: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- UL-certified
- Technical features:
- Socket mating cycle: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5

- Material plug housing: polycarbonate, natural
- Plug contact: Phosphor bronze, nickel 0.6 µ gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force: ≤ 30 N
- Diameter copper conductor: AWG (27/7 ... 24/7)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

### Attributes

- Category: CAT 5e

## Logistics

|                              | Number<br>(pcs) | Weight<br>(kg) | Depth<br>(cm) | Width<br>(cm) | Height<br>(cm) | cm³       |
|------------------------------|-----------------|----------------|---------------|---------------|----------------|-----------|
| Packaging Unit Carton        | 1               | 11.90          | 43.00         | 21.00         | 27.00          | 24,381.00 |
| Packaging Unit Inside        | 1               | 11.90          | 0.00          | 0.00          | 0.00           | 0.00      |
| Packaging Unit Single        | 1               | 11.90          | 0.00          | 0.00          | 0.00           | 0.00      |
| Net single without Packaging | 1               | 0.00           | 0.00          | 0.00          | 0.00           | 0.00      |

## Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)