

# DIGITUS® DisplayPort Connection Cable

AK-340100-100-S  
EAN 4016032329978



**DisplayPort Connection Cable, Type DP M/M, 10.0m, w/interlock, UHD 1080P, DP 1.1a, bi**

This high performance HD digital audio and video cable for example is used to connect a PC or notebook with DisplayPort interface to a monitor with DisplayPort interface.

**Ideal for CAD/CAM, GIS, 3D modeling, real time simulation, and more.**

- Support 1080p with 30Hz
- Max. supported Video Resolution: 1920 x 1080 p with 60 Hz
- Supported transmission modes: RBR, HBR, HBR2
- HDCP-Version: HDCP 1.3


**Attributes**

- Assortment: DisplayPort Cables
- AWG: 28

- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DP, plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: 1080p
- Hoods: molded
- Interlock: Snap fastener
- Packaging: Polybag
- Wire material: CU
- Length: 10 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 16           | 9.90        | 50.00      | 35.00      | 35.00       | 61.25           |
| Packaging Unit Inside        | 1            | 0.62        | 5.50       | 18.00      | 29.00       | 2.87            |
| Packaging Unit Single        | 1            | 0.62        | 5.50       | 18.00      | 29.00       | 2.87            |
| Net single without Packaging | 0            | 0.62        | 5.50       | 18.00      | 29.00       | 2.87            |

**More images:**

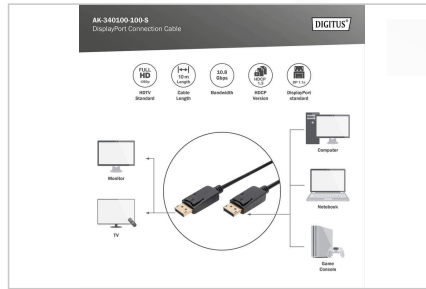

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)