

# DIGITUS® Wall Mounting Cabinets - Surface Mount

DN-19-WM-SURM-127  
 EAN 4016032383642



**Surface mount wall mounting cabinet, tilt-out 750x600x127 mm, 2U, color grey (RAL 7035)**

The flush- & surface mount Wall Mounting Cabinets allow a vertical, secure mounting for example for small sound equipments, networks, DVR, paging- and patching applications. The front door is able to swing-out. The Wall Mounting Cabinets are available in two different versions: With 2U or 4U possibilities for rack mounting.

**Slim design with swing-out front door**

- 1.0 - 1.5 mm strong steel sheet
- 2U usable space inside
- Pre-punched cable entry in the middle of the rear side (216x216 mm)
- Punched out cable entries with plastic cover on the rear side, as well as top and bottom (145x70 mm)
- Lockable front door with air ventilation units
- Front door is able to swing-out and is equipped with two stop functions (first stop at 25°, second stop at 115°)

- Several cable fixing points for a neat cable management
- Max. equipment mounting height inside: 402 mm

**Attributes**


- Cabinet type: Wall mounting cabinet, home automation
- Color: light grey, RAL 7035
- Depth: 127 mm
- Front door: Steel door, closed, single opening
- Load capacity: 100 kg
- Side panels: Both sides
- Units: 2
- Width: 600 mm
- IP protection class: IP20
- Mounted: yes

**Package contents**

- Earthing wire set

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	17.00	13.70	61.00	76.00	63,513.20
Packaging Unit Inside	1	17.00	13.70	61.00	76.00	63,513.20
Packaging Unit Single	1	17.00	13.70	61.00	76.00	63,513.20
Net single without Packaging	0	15.00	12.70	60.00	75.00	57.15

**More images:**

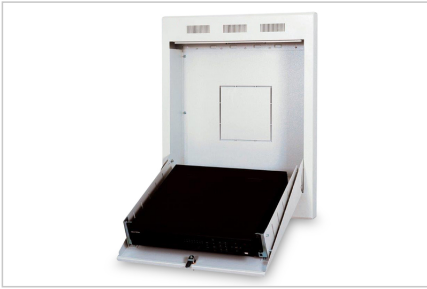

**Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)