


# DIGITUS USB Type-C connection cable, Type-C to B

AK-300149-018-S  
EAN 4016032437529

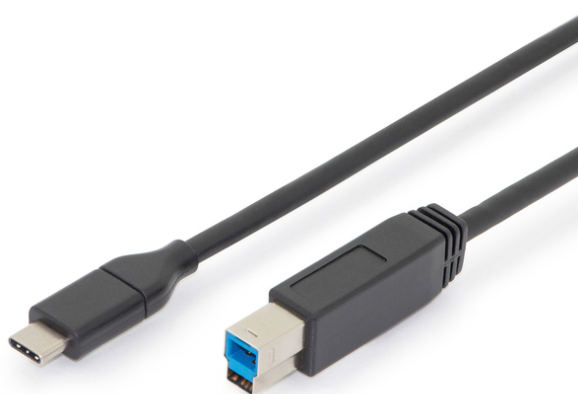

## USB Type-C connection cable, type C to B M/M, 1.8m, 3A, 5GB, 3.0 Version, bl

For connection of external USB 3.0 devices (with B socket, e.g. external HDD enclosure, scanner or printer) to the USB host (e. g. PC, notebook or USB hub). Datatransferrate up to 5 Gbps (Super-Speed).

### Type-C connector can be used in both directions

- SuperSpeed data transmissions up to 5 Gbit/s - 10x faster than USB 2.0
- Supports up to 3A Power supply
- Support of USB PD (Power Delivery) specification
- Type-C connector can be used in both directions

### Attributes

- Assortment: USB Cables
- AWG: 24/28
- Color cable: black
- Color connector: black
- Connector 1: USB C, plug
- Connector 2: USB B, plug
- Connector surface: nickel-plated
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 1.8 m
- Shielding: Double shielding
- USB-C Products: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	120	10.20	50.00	32.00	21.00	33.60
Packaging Unit Inside	1	0.07	35.00	28.00	7.00	6.86
Packaging Unit Single	1	0.09	13.00	24.00	4.50	1.40
Net single without Packaging	0	0.08	13.00	12.00	4.50	702.00

### More images:



**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)