

DIGITUS USB-C Universal Docking Station, 8 Port

DA-70884

EAN 4016032464518



8-Port USB-C Dock, 2xUSB3.0, 1xRJ45, 2xHDMI, 1xPD, 1xMicro SD, 1xSD, grey

The DIGITUS® USB-C docking station extends your notebook by 8 additional interfaces. Among other things, 2 HDMI interfaces with resolutions of up to 4K / 60 Hz are integrated. When connecting 2 monitors simultaneously, a resolution of Full HD 1080P / 60 Hz is supported. While the docking station is in use, you can charge the connected notebook via the existing USB-C Power Delivery Port. The maximum charging capacity is 100 W. 2 x USB 3.0 connections are also included to which according periphery devices such as a keyboard, mouse or an external hard drive / USB stick can be connected. With Battery Charge (BC 1.2), they also offer the possibility of charging devices such as smartphones or tablets. You can connect the existing Gigabit RJ45 connection with your router and, thus, the Internet. This then allows you to access your connected notebook. Two card slots for SD and Micro SC cards round off the docking station. Memory cards of up to 2 TB are supported. The compact housing with a brushed aluminum finish boasts a stylish and elegant look and is easily portable. Thanks to Plug and Play, a driver installation is not required. This way, the docking station can also be connected to external systems quickly.

Extend your notebook by 8 additional interfaces such as 4K HDMI, Gigabit Ethernet or USB 3.0 - with USB-C Power Delivery

- 2 x 4K HDMI connections
- 2 x USB 3.0 connections (SuperSpeed, 5 Gbps)
- 1 x PD 3.0 (Power Delivery) USB-C connection
- 1 x micro SD card slot up to 2 TB
- 1 x SD card slot up to 2 TB
- 1 x RJ45 Gigabit Ethernet interface with 10/100/1000 Mbps bandwidth
- Power Delivery: 100 W max.
- USB-C: USB 3.1 Gen 1
- USB A connections support 1 x 2.5" HDD total
- Resolution when using 1 x HDMI: UHD 4K / 60 Hz
- Resolution when using 2 x HDMI: Full HD 1080p / 60 Hz

- Downward compatible with Full HD 1080p, 720p, 480p
- 2 x USB 3.0 ports with transfer rates of up to 5 Gbps and BC 1.2 charging function
- Chipset: VL102/VM3332/PS176/VL817/GL3224/RTL8153B
- Hot swappable - Plug in or unplug devices whilst in use
- Plug and Play
- Operating temperature: 0°C ~ 40°C
- Operating humidity: 20% to 80% RH
- Housing material: Aluminum
- Cable length: 20 cm
- Weight: 80 g
- Dimensions: L 10.5 x W 5 x H 1.6 cm
- Manufacturer's notice:
- Not all USB-C ports support all functions of the USB Type-C standard. Make sure that your notebook's USB-C port supports the DisplayPort Alternate Mode (DP Alt Mode) as well as USB Power Delivery (PD).
- MST (Multi-Stream-Transport) is not supported by macOS.

Attributes

- HDTV Resolution max.: 3840 x 2160 Pixel, 30Hz
- LAN connector (RJ45): yes
- USB-C Power Delivery: 100W
- Card reader: yes
- Number of audio ports: 0
- Number of display ports: 2
- Number of network ports: 1
- Number of USB A ports: 2
- Number of USB-C ports: 1
- Number of video ports: 2
- USB-C Products: yes
- Video connection ports: HDMI



Package contents

- USB-C Universal Docking Station, 8 Port
- QIG

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	50	8.50	35.00	46.00	35.00	56.35
Packaging Unit Inside	1	0.17	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.17	17.50	13.50	2.50	590.63
Net single without Packaging	0	0.08	10.50	5.00	1.60	84.00

More images:

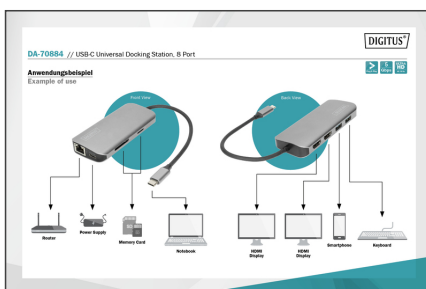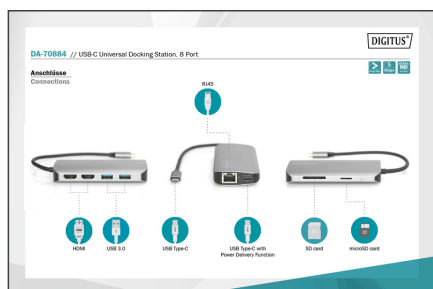

Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.

- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com