

# DIGITUS® Basic IT PDU, 3-phase 16A, 24 x C13, 3 x C19, 3 m supply cable, IEC 60309 16 A plug

DN-95452

EAN 4016032485971



### IT BASIC PDU, 3PH, 16A, 24 x C13, 3 x C19 Vertical, 3m cable, IEC309 3Ph-16A plug

The DIGITUS® PDU are the perfect solution for your network or server cabinet. With regard to power distribution, it fulfills the requirements of many applications in IT, network technology and laboratories. The individual C13 and C19 outlets are equipped with extract protection. It is optimally designed for vertical installation providing the advantage of saving rack spaces for more equipments. The 27 outlet PDU has excellent physical characteristics and is engineered for an output of up to 4,000 W (250 V AC / 16 A) which helps in achieving best performances with the appropriate load.

#### Safe and professional power distribution solution for highly demanding IT requirements in network and server racks

- Extraction protection at each output (for C13 and C19 standard cables)
- Vertical installation
- Housing: Aluminum
- Plastic components made of ABS UL-94V-0

- Mains plug: IEC60309 3ph/N/PE 6h, 230 V / 16 A plug
- Cable: 3 m
- Max. Load: 4000 W / 250 V AC / 16 A (50/60Hz)
- Outlets: 24 x IEC60320 C13, 3 x IEC60320 C19
- Output power: C13 (10A), C19 (16A)
- Dimensions (L x W x D): 1288,5 x 45 x 60 mm
- Colour: Black

#### Attributes


- Current: 16 A
- Input Plug: IEC 60309 16A 3ph/N/PE 6h
- Installation: Rack OU
- Outlets: IEC 60320 C13, IEC 60320 C19
- Phase: 3ph
- Power: 11 kVA
- Volts: 230 / 400 V

#### Package contents

- Scope of delivery: 1 socket strip, 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	28.50	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	2.85	0.00	0.00	0.00	0.00
Packaging Unit Single	1	2.85	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	933.15

**More images:**

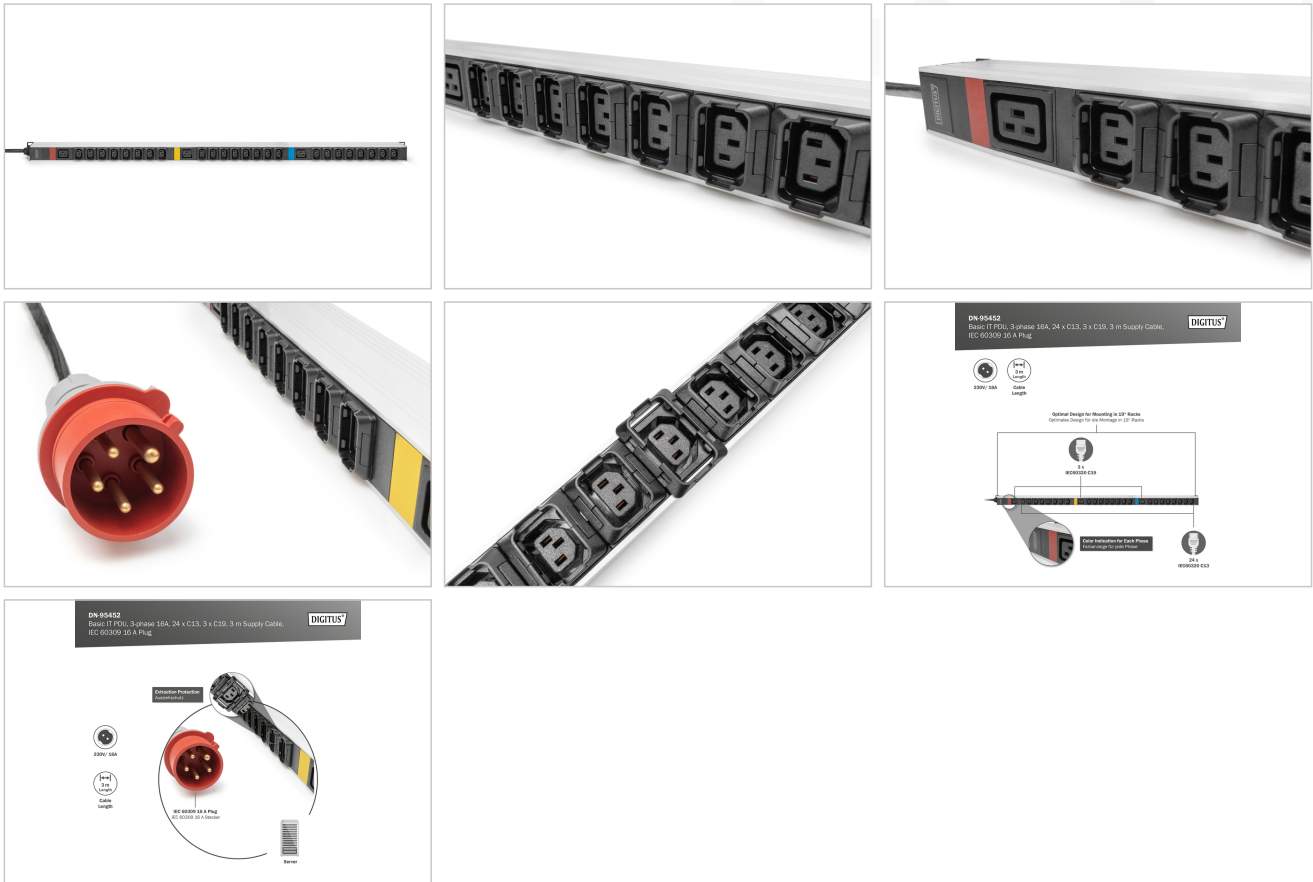

**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)