

Planet Industrial 8 Port Fast Ethernet Switch, Unmanaged

PL-ISW-801T
EAN 4711213687228



Planet IP30 Industrial Switch 8x10/100 RJ45, (-40 to 75 C)

Industrial switch, IP 30, aluminum casing, 8x 10/100Base-TX (RJ45), Auto MDI / MDI -X , half / full duplex, Supports 6KV DC Ethernet ESD protection, Supports 6KV DC EFT protection for power line, operating temperature -40 - 75 degrees C, for DIN- rail and wall mounting , Dimension (W x D x H) 135 x 87 x 32 mm, power supply for 12 - 48V DC

The best Solution for rough Environmental Conditions!

- 8-Port 10/100Mbps Auto MDI/MDI-X RJ45
- Complies with IEEE 802.3 10Base-T and IEEE 802.3u 100Base-TX Ethernet standard
- Supports Auto-Negotiation and 10/100Mbps half / full duplex mode
- High performance Store and Forward architecture
- Prevents packet loss with back pressure (Half-Duplex) and IEEE 802.3x PAUSE frame flow control (Full-Duplex)
- 1.6Gbps Backplane


- Integrated address look-up engine, supports 2K absolute MAC addresses
- IP-30 protection with metal case
- Suitable for DIN rail (top-hat rail) mounting
- Redundant Power Design: 12~48V DC, 24V AC, redundant power with polarity reverse protect function
- -40 to 75 °C operating temperature
- Free fall, Shock and Vibration Stability

Attributes

- Number of ports: 8
- Ethernet speed: Fast Ethernet
- Industrial usage: yes
- Installation type: DIN rail
- Managed: no
- Outdoorsuitable: no
- PoE (Power over Ethernet): no
- Protection against vanadism: no
- VLAN: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	9.08	32.00	41.50	27.99	37,170.70
Packaging Unit Inside	1	0.60	5.00	21.50	15.00	1,612.50
Packaging Unit Single	1	0.60	5.00	21.50	15.00	1,612.50
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

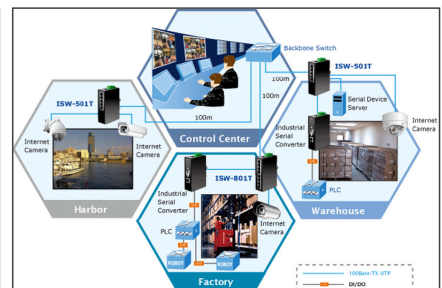

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Gewerbepark 8
Kalsdorf bei Graz, Austria
<https://www.assmann24h.at>
office@assmann24h.at