

# DIGITUS® CAT 7 S/FTP data cable - installation cable, 1000 m, simplex, Dca-s2, d1, a1

DK-1743-VH-10

EAN 4016032300786



## CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 1000 m drum, sx, orange

The Digitus Cat 7 installation cable is designed for use in structured data centers and building cabling in accordance with ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 61156-7, EN 50288-9-1. The cable is ideal for the transmission of analog and digital data and supports PoE, PoE+, 4PPoE (IEEE 802.3af;3at;3bt). The shield structure consists of individually shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

### Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 23/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: aluminum-laminated polyester film, covers 100%
- Overall shielding: copper braiding
- Outer sheath: Eca to B2ca in accordance with EN 50575; LSZH
- Outer sheath thickness (nominal): 0.50 mm (Eca); 0.52 mm (Dca); 0.60 mm (Cca); 0.60 (B2ca)
- Color: Orange (RAL 2008)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C

- Operating temperature range: -20 °C to +50 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 7.0 mm (Eca); 7.2 mm (Dca); 7.5 mm (Cca); 7.5 mm (B2ca)
- Weight (kg/km): 49.5 kg (Eca); 51 kg (Dca), 53 kg (Cca); 53 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 1000 MHz; 100±25 OHM @ 100-600 MHz
- Capacitance: 45 pF/m nominal @ 1KHz
- Capacitance unbalance (pair-earth): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. unbalanced resistance)
- Loop resistance: 190 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Outer sheath: Dca-s2 d1 a1 acc. to EN 50575; LSZH
- Coupling attenuation: CA-Type 1b
- Phase delay: 450 nS/100 m max.
- Time delay: 10 nS/100 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%

### Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 1000 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	1	54.00	55.00	55.00	35.00	105,875.00
Packaging Unit Inside	1	54.00	55.00	55.00	35.00	105,875.00
Packaging Unit Single	1	54.00	55.00	55.00	35.00	105,875.00
Net single without Packaging	0	54.00	55.00	55.00	35.00	105,875.00

More images:



**DIGITUS**

- AWG 23/1
- 1200 MHz
- 10 Gbit Ethernet
- CAT 7
- LSZH
- CFR class

**CAT 7 S/FTP Installation Cable, 1000 m, Simplex, D<sub>ca</sub>**

**DIGITUS**

**DK-1743-VH-10 // CAT 7 S/FTP Installation Cable, 1000m, Simplex, D<sub>a</sub>**

**Anwendungsbild**  
Example of use

**DIGITUS**

**DK-1743-VH-10 // CAT 7 S/FTP Installation Cable, 1000m, Simplex, D<sub>a</sub>**

**Kabelquerschnitt**  
Cable cross section


**DIGITUS**

Technische Informationen	Physikalische Spezifikationen
<b>Produktbeschreibung</b> Kategorie: CAT 7 S/FTP Installation Cable, 1000m, Simplex, D <sub>ca</sub>	<b>Technische Spezifikationen</b> Kategorie: CAT 7 S/FTP Installation Cable, 1000m, Simplex, D <sub>ca</sub>
<b>Technische Eigenschaften</b> Kategorie: CAT 7 S/FTP Installation Cable, 1000m, Simplex, D <sub>ca</sub>	<b>Mechanische Eigenschaften</b> Kategorie: CAT 7 S/FTP Installation Cable, 1000m, Simplex, D <sub>ca</sub>

**DIGITUS**

**Leistungsparameter**

Parameter	AWG	1000	1000	1000	1000	1000	1000	1000
1000	1000	1000	1000	1000	1000	1000	1000	1000

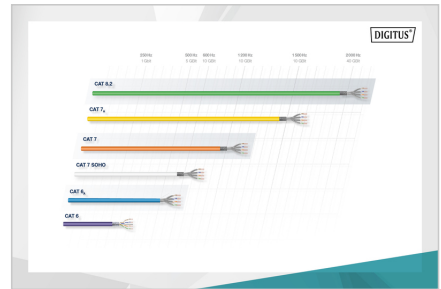

**DIGITUS**

**ESD Protection**

B2a	High	1+
Cca	High	1+
Dca	High	3
Eca	Low	3

**ESD Protection**

- ESD Protection
- ESD Protection
- ESD Protection

