


DIGITUS® CAT 7A S/FTP, data cable - installation cable, 100 m, duplex, Dca-s1a d1 a1, GHMT PVP certified

DK-1743-A-VH-D-1

EAN 4016032483632

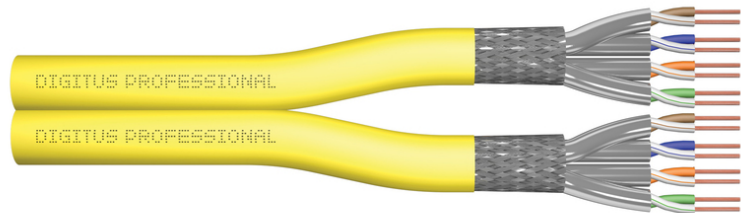

CAT 7A S-FTP installation cable, 1500 MHz Dca (EN 50575), AWG 22/1, 100 m ring, Dx, Yellow

The Digitus Cat 7 installation cable is designed for use in structured data centers and building cabling in accordance with ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 61156-7, EN 50288-9-1. The cable is ideal for the transmission of analog and digital data and supports PoE, PoE+, 4PPoE (IEEE 802.3af;3at;3bt). The shield structure consists of individually shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire AWG 22/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: aluminum-laminated polyester film, covers 100%
- Overall shielding: copper braiding
- Outer sheath: Halogen-free (FRNC-C/LSZH-3)
- Outer sheath thickness: 0.6 mm nominal
- Color: Yellow (RAL 1016)
- Length: 100 m
- Mechanical properties:
- Tensile load: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C

- Operating temperature range: -20 °C to +60 °C
- Installation temperature range: 0 to +50C
- Outer diameter: 8.0 mm nominal
- Flame retardancy: IEC 60332-3-24
- Halogen-free & smoke-tight: IEC 60754-2 & IEC 61034
- Fire load: 700 Mj/km
- Electrical properties:
- Average impedance: 100±5 Ohm at 1-600 MHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-earth): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- Loop resistance: 147 Ohm/Km max. (2% max. resistance unbalance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: Grade 1 (CA-Type 1b)
- Time delay: 10 nS/100 m max.
- Phase delay: 450 nS/100 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Flame spread: EN 60332-1-2 (LSOH-PVC)
- Halogen-free, corrosiveness: EN 60754-1/2 (LSOH)
- Smoke density: EN 61034-2




Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 100 m
- Color: yellow
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

Logistics


| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
|-------------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| Packaging Unit Carton | 1 | 10.14 | 36.00 | 36.00 | 16.00 | 20,736.00 |
| Packaging Unit Inside | 1 | 10.14 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Single | 1 | 10.14 | 36.00 | 36.00 | 16.00 | 20,736.00 |
| Net single without Packaging | 0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

More images:

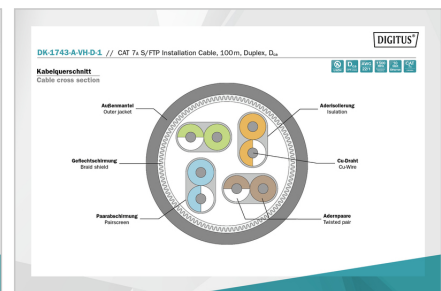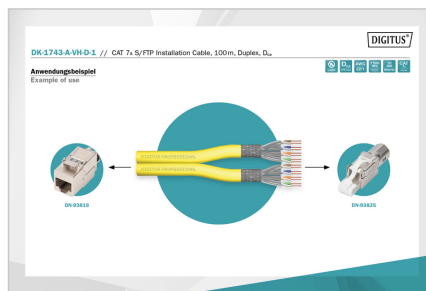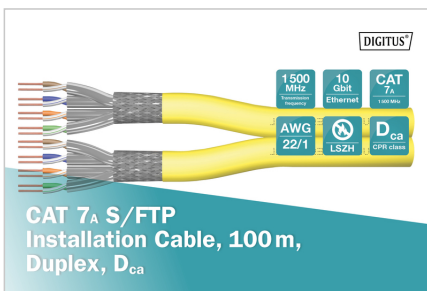

| Produktdatenblatt Produkt Information | Physikalische Spezifikationen Physical Properties |
|--|--|
| Bestellnummer DK-1743-A-VH-D-1 | Teilenummer DK-1743-A-VH-D-1 |
| Produktname CAT 7A S/FTP Installation Cable, 100m, Duplex, Dca | Produktname CAT 7A S/FTP Installation Cable, 100m, Duplex, Dca |
| Hersteller Digitus | Hersteller Digitus |
| Material Kupfer, LSZH | Material Kupfer, LSZH |
| Farbe Gelb | Farbe Gelb |
| Abmessungen 100m | Abmessungen 100m |
| Nettogewicht 10.14 kg | Nettogewicht 10.14 kg |
| Bruttogewicht 10.14 kg | Bruttogewicht 10.14 kg |
| Verpackungseinheit 100m | Verpackungseinheit 100m |
| Umweltbedingungen -40°C bis +75°C | Umweltbedingungen -40°C bis +75°C |
| Spezifikationen 1500 MHz, 10 Gbit Ethernet, CAT 7A, AWG 22/1, LSZH, Dca CB CPE edition | Spezifikationen 1500 MHz, 10 Gbit Ethernet, CAT 7A, AWG 22/1, LSZH, Dca CB CPE edition |

| Leitungsverhalten Transmission Properties | | | | | | | | | |
|---|------|------|---------|-----|--------|-----|-------|----------|----------|
| FREQ. | ATT | NEXT | PS NEXT | ASL | PS ACS | RL | ELK21 | PS ELK21 | PS ELK21 |
| 1 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| 10 | 0.2 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| 100 | 0.5 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| 1000 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| 10000 | 2.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| 100000 | 5.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| 1000000 | 10.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| 10000000 | 20.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| 100000000 | 40.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| 1000000000 | 80.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |

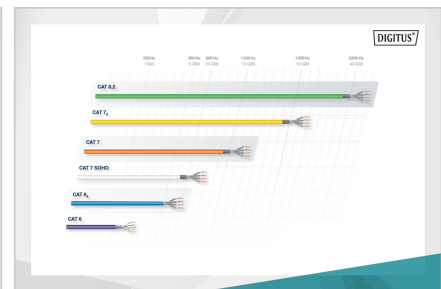

| ESD-Konformität | Bestandteile | Leitungsverhalten (AVP) | Abgleich der Konformität | Zusätzliche Informationen |
|-----------------|--------------|-------------------------|--------------------------|---------------------------|
| B2ca | Selbst hoch | 1+ | • Spannungsfeld | S Bestimmung |
| Cca | Hoch | | • Feldstärke | d Bestimmung |
| Dca | Mittel | 3 | • Feldstärke | a Bestimmung |
| Eca | Gering | | • Feldstärke | |
| Cca | sta | d1 | a1 | |