


DIGITUS Fttx installation kit, pre-assembled, 4-fiber, LC/APC connector, length 30 m

DN-948030-1
EAN 4016032500797

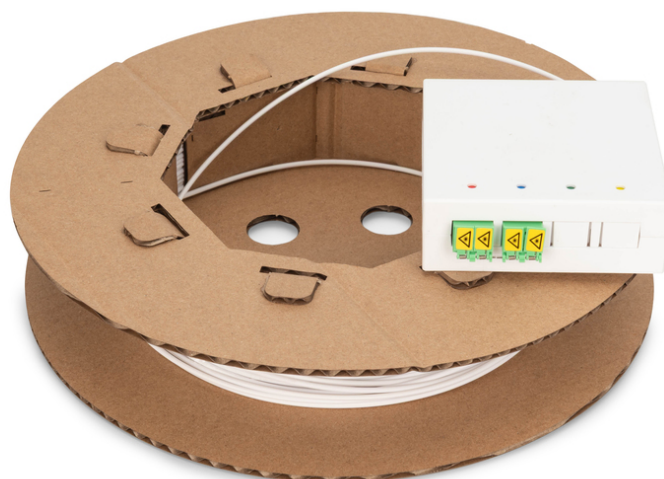

Fttx - Installation Kit, 4-Core, LC connector 30 m, APC, NE4

The growing demand to extend the fiber optic network into the home requires products that enable simple and efficient installation of this network. The Digitus FTTH installation kit is a solution that makes it easy to extend and complete the fiber optic network in the home. The simplicity of the installation results from the fact that the product is supplied with all the necessary components, thus eliminating the need to search for the components for the installation individually. The junction box can be mounted in the designated location and connection to the router is made easier as the LC/APC connectors are already included. The integrated fiber drop cable can then be pulled to make the connection to the house handover point, which is mounted in the building as the entry point for the fiber network. It provides additional connections and splicing options to meet the requirements for scaling the number of fiber connections.

The compact FTTH kit with pre-assembled fiber optic installation cable on one side is ideal for installing high-speed fiber optic connections within the home for network level 4.

- FTTH junction box :
- Junction box for FTTH applications
- 2x LC-APC duplex fiber optic coupler with shutter
- The shutter of the clutch protects against lasers and dust

- Adapter type : LC/APC Duplex
- Number of ports: 4
- Number of equipped ports: 2
- Integrated splice cassette
- Dimensions (H*W*D) : 80 x 80 x 28 mm
- Color : White
- Weight : 60 g
- Working temperature : -40 - + 65 C
- Material: ABS
- FTTH drop cable :
 - 4 fibres 9/125µm G.657A2 bend-optimized
 - Cable diameter : 2.0mm
 - 900µm buffer, easily removable
 - Aramid strain relief
 - LSOH outer sheath, color white
 - Cable structure: I/A-V(Q(ZN))H
- Operating and storage temperature (□) : -15 - +70
- Installation Temperature range (□) : -10 - +60

Package contents

- Fttx installation kit, pre-assembled, 4-fiber, LC/APC connector, length 30m
- Mounting accessories (screws and dowels)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	9	6.86	42.00	41.00	30.00	51,660.00
Packaging Unit Inside	1	0.76	5.50	25.00	25.50	3,506.25
Packaging Unit Single	1	0.76	5.50	25.00	25.50	3,506.25
Net single without Packaging	0	505.00	5.00	21.00	21.00	0.00

More images:

