


# DIGITUS® Mains connection cable

AK-440101-018-S  
EAN 4016032311751

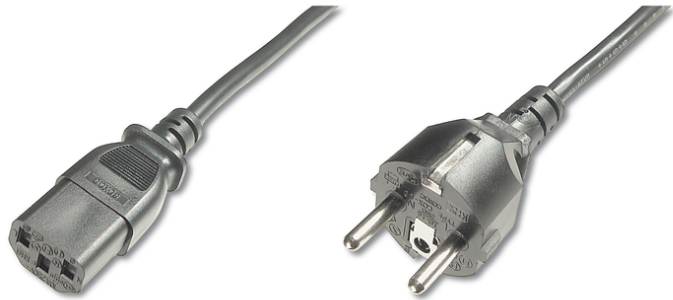

**Power Cord, CEE 7/7 (Typ-F) - C13 M/F, 1.8m, H05VV-F3G 0.75qmm, black**

This power cable is used to connect a PC or monitor to the household power supply (socket).

**European country approvals**

- VDE tested

**Attributes**

- Assortment: Device Connection Cables
- Cable standard: H05 VV F3G
- Color cable: black

- Color connector: black
- Connector 1: CEE 7/7, plug
- Connector 2: IEC C13, jack
- Connector surface: nickel-plated
- Current load capacity: 250V/10A
- Hoods: molded
- Lead cross-section: 0.75qmm
- Packaging: Polybag
- Wire material: CU
- Length: 1.8 m
- Shielding: Unshielded

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	70	14.46	54.60	35.50	19.70	38,184.50
Packaging Unit Inside	10	2.07	21.00	32.50	5.00	3,412.50
Packaging Unit Single	1	0.21	3.50	15.00	18.00	945.00
Net single without Packaging	0	0.18	15.00	13.50	3.00	607.50

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)