


# DIGITUS® CAT 6 Modular plugs for round cable, Pass through connector

AK-219603

EAN 4016032316817

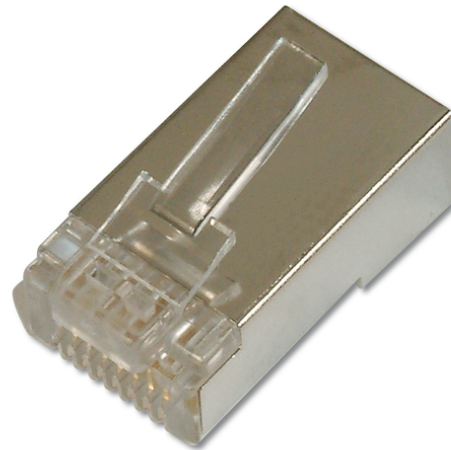

## CAT 6 Modular Plug, 8P8C, shielded for Round Cable, pass through connector

Easy assembly by modular crimping tool DN-94025

- Crimping tool – DN-94025 (Multi Modular Crimping Tool Pass through connectors)
- Layout performance: CAT 6, 1GBase-T
- Area of application: Patch cable assembly
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- UL certified
- Technical properties:

- Mating cycles female: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Material connector body: Polycarbonat, clear
- Connector contact: Phosphor bronze, brass 0.6 mm gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force:  $\approx$  30 N
- Diameter Cu-Conductor: AWG (27/7 ... 24/7)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

### Attributes

- Kategorija: CAT 6

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	5	11.80	41.00	38.00	21.00	32.72
Packaging Unit Inside	100	0.24	17.00	13.00	3.00	663.00
Packaging Unit Single	1	0.00	2.00	1.00	0.50	1.00
Net single without Packaging	0	0.00	3.00	3.00	1.50	13.50

## Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>

[info@assmann.com](mailto:info@assmann.com)